2MP IR Bullet Camera with 2.8mm Lens with Audio







SATATYA MIBR20FL28CWP

2MP IR Bullet Camera with 2.8mm Lens with Audio

Matrix Professional Series IP Cameras are built using superior components such as Sony STARVIS sensor and higher MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying lighting conditions. Built in intelligent analytics including Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.

USP



SONY STARVIS SENSOR



H.265 COMPRESSION



IVA



HIGHER FIELD OF VIEW



SMART STREAMING



ADAPTIVE STREAMING



TRUE WDR



NAS

CERTIFICATION













Customer Care: (+91) 265 613 7222 E-mail: lnquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com

2MP IR Bullet Camera with 2.8mm Lens with Audio



TECHNICAL SPECIFICATIONS IMAGE SENSOR	
	1/2.8" SONY - CMOS 2MP Active Pixel
Sensor Type and Size	Progressive Scan, Back Illuminated Image sensor (STARVIS Series)
	LENS
	Color - 0.01 Lux @F1.2 (AGC ON)
Minimum Illumination	Monochrome - 0 Lux
Focal Length	2.8mm
Focus Range	0.3m to infinity
	HFOV – 106.9°
Field of View (FOV)	VFOV – 56.9° DFOV – 127.9°
Field of View (FOV) Lens Mount	M12
Focus	Fixed focus
Aperture (F#)	F 1.6/ F2.0
• • • • • • • • • • • • • • • • • • • •	·
Iris Type	Fixed
IR Range	Up to 30m
IR Led Wavelength	850nm
IR Switching	Auto/ Manual
	AUDIO INTERFACE
Audio IN	
Audio OUT	1
Two-way Audio	Supported
Audio Compression	G.726 and G.711μ
	HARDWARE SPECIFICATIONS
SD Card	Up to 512GB
Camera Adjustment Angle	Pan - 0° to 360°
	Tilt - 0° to 75°
	Rotate - 0° to 180°
	IMAGE AND VIDEO
No of Stream Profiles	4
	Profile 1: 1920x1080p(2MP) @30fps (H.265/ H.264)
	Profile 2: D1 @30fps (H.265/H.264)
Stream Profiles	Profile 3: 1920x1080p(2MP) @5fps (MJPEG) Profile 4: 720p @30fps (H.265/H.264/MJPEG)
Available Resolutions	1920 x 1080, 720p, D1, VGA, 2CIF, CIF
Available Nesolutions	1320 x 1000, 720p, D1, VOA, 2011, CII

Customer Care: (+91) 265 613 7222 E-mail: lnquiry@MatrixComSec.com www.MatrixVideoSurveillance.com

2MP IR Bullet Camera with 2.8mm Lens with Audio



Max Resolution	1920 x 1080
Bitrate	128 kbps-8Mbps
Bitrate Type	CBR, VBR
Video Compression	H.265, H.264, MJPEG
Frame Rate	1-30fps
Shutter Speed	1/15s - 1/100000s
Adaptive Streaming	Yes
ONVIF Profiles	Both S and G
Edge Recording	Yes
Alarm Recording	Pre and Post
Motion Recording	Yes
Time Triggered	Yes
Video Parameters	Snapshot, Region of Interest (ROI), BLC, Day/Night Settings
Privacy Masks	3
WDR	True WDR (120dB)
SNR	71dB
Image Enhancement	Rotation/ Saturation/ Contrast/ Sharpness/ Brightness/ Hue/ White Balance
DNR	2D &3D
Video Analytics	Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection, Object Intrusion/Zone Intrusion, Audio Exception
	ALERTS
IP Conflict	Yes
Network Disconnect	Yes
Storage Full	Yes
	EVENTS AND ACTIONS
Upload Image	SD, NAS, FTP
Upload Clip	SD, NAS, FTP
Notifications	E-mail, SMS, TCP
	PROTOCOLS SUPPORTED
Supported protocols	TCP/IP, HTTP, ARP, DSCP, QoS, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP, NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP, 802.1x, SNMP, UPnP, Bonjour, UDP
Web Viewer	Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0
Browser	IE, Chrome, Mozilla

Customer Care: (+91) 265 613 7222 E-mail: lnquiry@MatrixComSec.com www.MatrixVideoSurveillance.com


2MP IR Bullet Camera with 2.8mm Lens with Audio




OPERATING PARAMETERS	
Power Supply	12V (DC); 802.3af (PoE)
Power Consumption	Approximately 5.5W
Operating Humidity	Less than 95% RH (non-condensing)
Operating Temperature	-30°C to 60°C
Storage Temperature	-30°C to 60°C
PHYSICAL PARAMETERS	
Communication interface	10Base-T/100BaseTX Ethernet (RJ-45)
Weight	500gms
Color	Infinity White
Dimensions	155 x 75 (Length x Width)
Storage	NAS, SD Card
Certifications	BIS, CE, IP67, FCC Part-15 Subpart – B, ONVIF S & G, IK10

^{*}Specifications are subject to change without prior notice

DIMENSIONS (in mm)



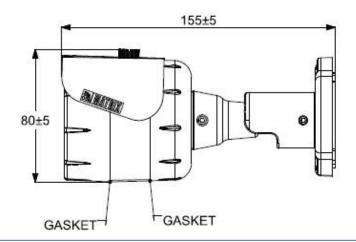



Customer Care: (+91) 265 613 7222 E-mail: lnquiry@MatrixComSec.com www.MatrixVideoSurveillance.com

2MP IR Bullet Camera with 2.8mm Lens with Audio



ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.



MATRIX COMSEC

Head Office 394-GIDC, Makarpura, Vadodara – 390 010, India.

Ph: +91 265 613 7222

E-mail: Inquiry@MatrixComSec.com

Factory

19 – GIDC, Waghodia, Dist. Vadodara – 391 760, India.

Ph: +91 265 613 7222

MATRIX COMSEC - North America

2 Wickstead Crt, Brampton, Ontario, L6R 1N8.

Ph: (+1) 408-643-0581 (USA) Ph: (+1) 437-266-1005 (Canada)

www.MatrixVideoSurveillance.com

Customer Care: (+91) 265 613 7222 E-mail: Inquiry@MatrixComSec.com www.MatrixVideoSurveillance.com