2MP IR Bullet Camera with 3.6mm Lens with Audio







SATATYA MIBR20FL36CWP

2MP IR Bullet Camera with 3.6mm Lens with Audio

Matrix Professional Series IP Cameras are built using superior components such as Sony STARVIS sensor and higher MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying lighting conditions. Built in intelligent analytics including Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.

USP



SONY STARVIS SENSOR



H.265 COMPRESSION



IVA



HIGHER FIELD OF VIEW



SMART STREAMING



ADAPTIVE STREAMING



TRUE WDR



NAS

CERTIFICATION

















Customer Care: (+91) 265 613 7222 E-mail: Inquiry@MatrixComSec.com www.MatrixComSec.com

Make in India

2MP IR Bullet Camera with 3.6mm Lens with Audio



TECHNICAL SPECIFICATIONS IMAGE SENSOR		
Sensor Type and Size	1/2.8" SONY - CMOS 2MP Active Pixel Progressive Scan, Back Illuminated Image sensor (STARVIS Series)	
LENS		
	Color - 0.01 Lux @F1.2 (AGC ON)	
Minimum Illumination	Monochrome - 0 Lux	
Focal Length	3.6mm	
Focus Range	0.3m to infinity	
	HFOV – 87.5°	
Field of View (FOV)	VFOV – 44.4° DFOV – 104.9°	
Field of View (FOV) Lens Mount	M12	
Focus	Fixed focus	
Aperture (F#)	F 1.6 / F 2.0	
. , ,	Fixed	
Iris Type		
IR Range	Up to 30m 850nm	
IR Led Wavelength		
IR Switching	Auto/ Manual	
AUDIO INTERFACE Audio IN 1		
Audio OUT	1	
Two-way Audio	Supported C 722 and C 722	
Audio Compression	G.726 and G.711µ	
HARDWARE SPECIFICATIONS		
SD Card	Up to 512GB	
Camera Adjustment Angle	Pan - 0° to 360°	
	Tilt - 0° to 75° Rotate - 0° to 180°	
	IMAGE AND VIDEO	
No of Stream Profiles	4	
	Profile 1: 1920x1080p(2MP) @30fps (H.265/ H.264)	
	Profile 2: D1 @30fps (H.265/H.264)	
	Profile 3: 1920x1080p(2MP) @5fps (MJPEG)	
Stream Profiles	Profile 4: 720p @30fps (H.265/H.264/MJPEG)	
Available Resolutions	1920 x 1080, 720p, D1, VGA, 2CIF, CIF	

2MP IR Bullet Camera with 3.6mm Lens with Audio



Max Resolution	1920 x 1080	
Bitrate	128 kbps-8Mbps	
Bitrate Type	CBR, VBR	
Video Compression	H.265, H.264, MJPEG	
Frame Rate	1-30fps	
Shutter Speed	1/15s - 1/100000s	
Adaptive Streaming	Yes	
ONVIF Profiles	Both S and G	
Edge Recording	Yes	
Alarm Recording	Pre and Post	
Motion Recording	Yes	
Time Triggered	Yes	
Video Parameters	Snapshot, Region of Interest (ROI), BLC, Day/Night Settings	
Privacy Masks	3	
WDR	True WDR (120dB)	
SNR	71dB	
Image Enhancement	Saturation/ Contrast/ Sharpness/Brightness/Auto Exposure/HVS-Forensics/ Smart IR	
DNR	2D &3D	
Video Analytics	Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection, Object Intrusion/Zone Intrusion, Audio Exception	
	ALERTS	
IP Conflict	Yes	
Network Disconnect	Yes	
Storage Full	Yes	
EVENTS AND ACTIONS		
Upload Image	SD, NAS, SFTP	
Upload Clip	SD, NAS, SFTP	
Notifications	E-mail, SMS, TCP	
	PROTOCOLS SUPPORTED	
Supported protocols	TCP/IP, HTTP, ARP, DSCP, QoS, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP, NTP, HTTPS, TLS/SSL, SFTP, ICMP, IGMP, 802.1x, SNMP, UPnP, Bonjour, UDP	
Web Viewer	Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0	
Browser	IE, Chrome, Mozilla	

2MP IR Bullet Camera with 3.6mm Lens with Audio




CYBER SECURITY		
Secure boot	Yes	
Signed firmware	Yes	
Data Encryption	All data, including sensitive data, is encrypted with AES 256 and RSA 2048	
IP Address Filtering	Yes	
HTTPs Streaming	Yes, using TLS 1.2	
Edge Data Encryption	Yes	
Network Authentication	Yes, 802.1x Network authentication	
Secure Firmware Upgrade	Yes	
Anti-roll back firmware	Yes	
Web login Password Protection	Yes	
Unused Debug Interface Protection	Yes	
OPERATING PARAMETERS		
Power Supply	12V (DC); 802.3af (PoE)	
Power Consumption	Approximately 5.5W	
Operating Humidity	Less than 95% RH (non-condensing)	
Operating Temperature	-30°C to 60°C	
Storage Temperature	-30°C to 60°C	
PHYSICAL PARAMETERS		
Communication interface	10Base-T/100BaseTX Ethernet (RJ-45)	
Weight	500gms	
Color	Infinity White	
Dimensions	155 x 75 (Length x Width)	
Storage	NAS, SD Card	
Certifications	BIS, CE, IP67, FCC Part-15 Subpart – B, ONVIF S & G, IK10, STQC Certified with OWASP ASVS 4.0 L2	


^{*}Specifications are subject to change without prior notice*

2MP IR Bullet Camera with 3.6mm Lens with Audio



DIMENSIONS (in mm)



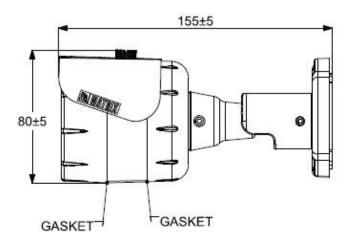



2MP IR Bullet Camera with 3.6mm Lens with Audio



ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.



MATRIX COMSEC

Head Office 394-GIDC, Makarpura, Vadodara – 390 010, India.

Ph: +91 265 613 7222

E-mail: Inquiry@MatrixComSec.com

Factory

19 – GIDC, Waghodia, Dist. Vadodara – 391 760, India. Ph: +91 265 613 7222

MATRIX COMSEC – North America

2 Wickstead Crt, Brampton, Ontario, L6R 1N8.

Ph: (+1) 408-643-0581 (USA) Ph: (+1) 437-266-1005 (Canada)

www.MatrixComSec.com

Customer Care: (+91) 265 613 7222 E-mail: lnquiry@MatrixComSec.com www.MatrixComSec.com