




VISIONPRO

The Digital PBX for Small Offices

EXPECT MORE.



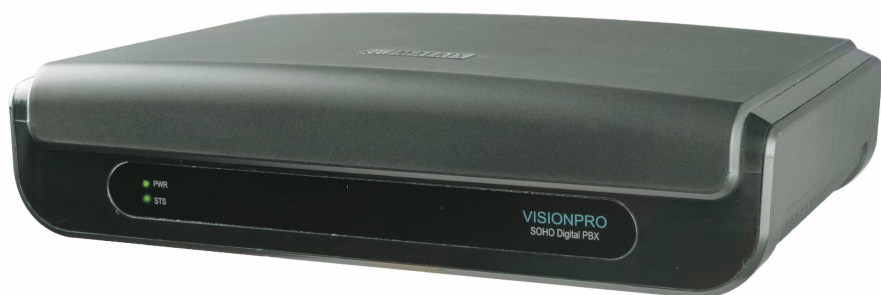

Matrix VISIONPRO

The Digital PBX for Small Offices



CLI



Conference



1-Port PFT



100% Non-blocking




Auto Attendant

Presentation Outlook



- Target Customers
- Key Differentiators
- Product Variants
- Key Features
- Technical Specifications

Target Customers

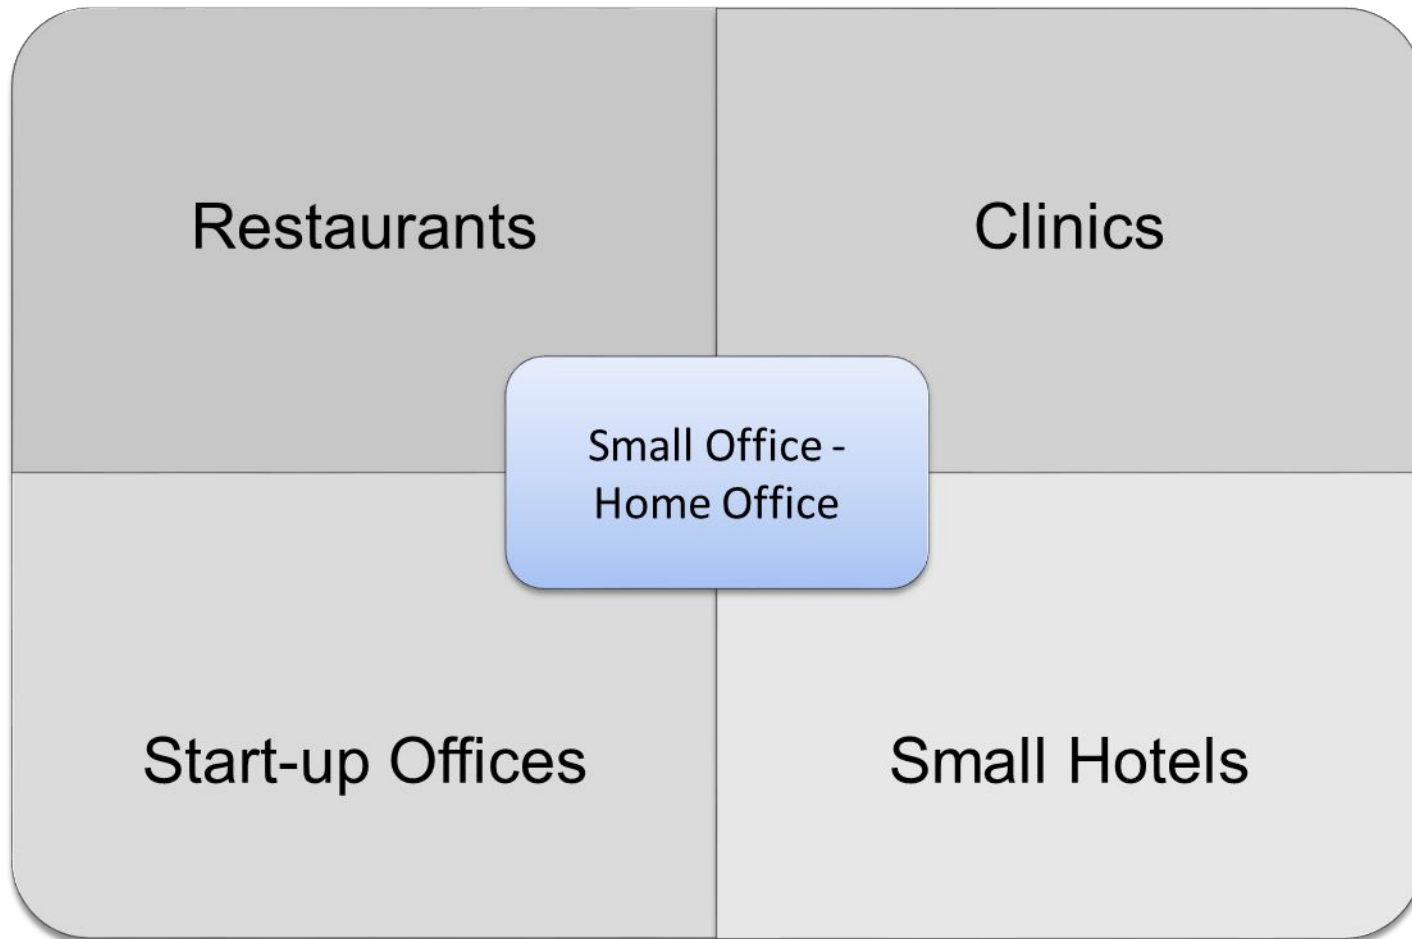

Key Differentiators

- Built-on DSP based Architecture
- Compact Footprint
- Built-in Auto-Attendant
- Built-in dual 3-Party Conference
- No Speech Path Limitations
- Built-in Power Fail Transfer
- Built-in CLI (both DTMF and FSK)



CLI – DTMF & FSK




Conference



100% Non-blocking



1-Port PFT




Auto Attendant

Product Variants


VISIONPRO206	Digital PBX with 2 Trunks and 6 Analog Extensions
VISIONPRO308	Digital PBX with 3 Trunks and 8 Analog Extensions
VISIONPRO412	Digital PBX with 4 Trunks and 12 Analog Extensions

Front View

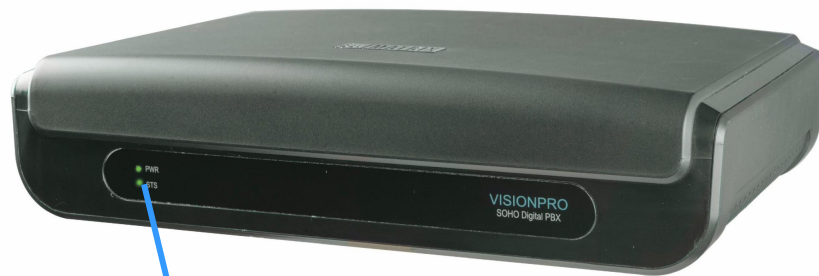

LEDs
For Power and Status

Rear View

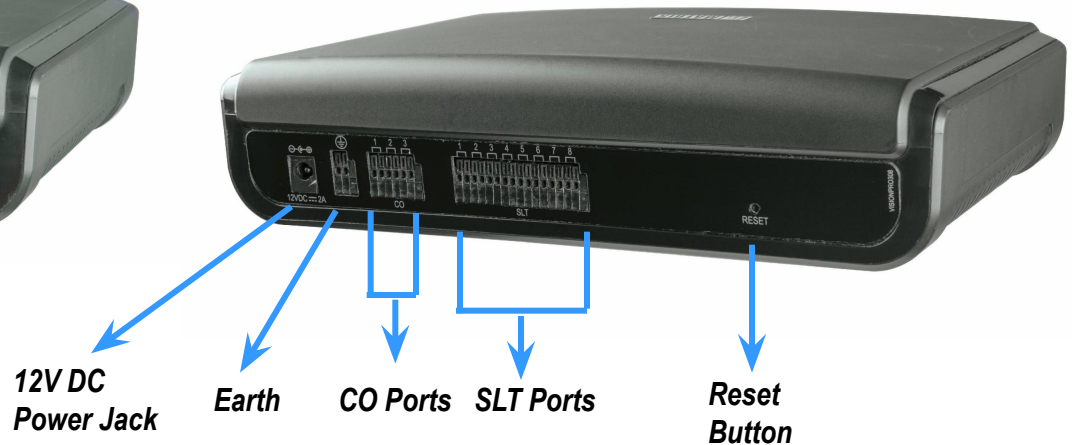

12V DC
Power Jack

Earth

CO Ports

SLT Ports

Reset
Button

Key Features

- Allowed and Denied List
- Abbreviated Dialing
- Alternate Number Dialing
- Auto-Attendant
- Auto Callback
- Auto Redial-Multiple Number
- Auto Shut Dynamic Lock
- Caller Line Identification
- External Call Forward
- Conference
- CLI based Routing
- Direct Inward Dialing
- Executive/Secretary
- Remote Programming
- Public Address System
- Flexible numbering
- Voice Messages

Auto-Attendant


- Built-in Feature
- Supports Dial-by-Name
- Overcome unexpected disasters by re-routing callers
- Eliminate over-staffing and increase productivity

Allowed and Denied List

- Allows/Restrict Dialing of Specific Area Codes or Numbers
- Up to 8 Programmable Allowed and Denied List
- Maximum 16 Entries per List and each of 16 Digits Length
- Prevents Misuse of Long Distance/International Dialing Facility
- A Very Useful Cost Control Parameter

Alternate Number Dialing

General Manager

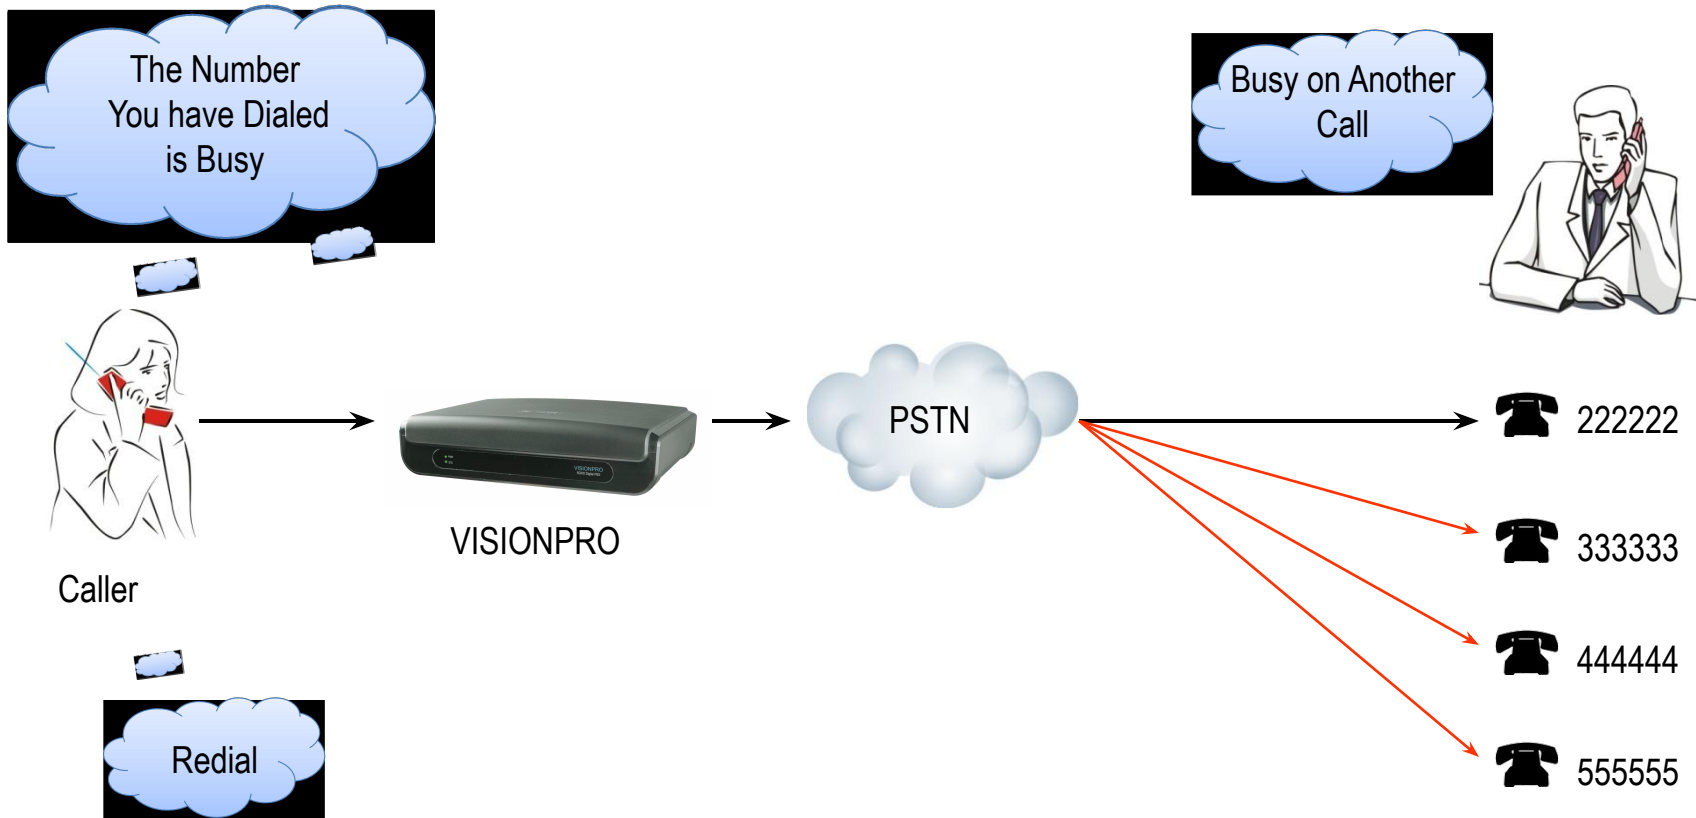

Auto Call Back

When Boss Answers
PBX Gives RBT
to Secretary

As Secretary Becomes Free,
PBX Generates Ring at Boss's
End

Extension
Ringing



Boss



VISIONPRO



Secretary



Employee

Already in
Conversation




Auto Redial-Multiple Numbers

- No Need to Redial a Busy Extension Repeatedly
 - VISIONPRO Redials a busy number till It gets through and gives you ring when Call gets connected
 - Three Number can be Set for Auto Redial
- ❖ Note: The Auto Redial feature is supported for external numbers only.

Caller Line Identification-DTMF & FSK

- Caller's number is displayed on the CLI display of the Analog Phone
- CLI is Displayed in following Communications
 - ✓ Trunk Calls
 - ✓ Internal Calls
 - ✓ Transferred Calls


CLI based Routing

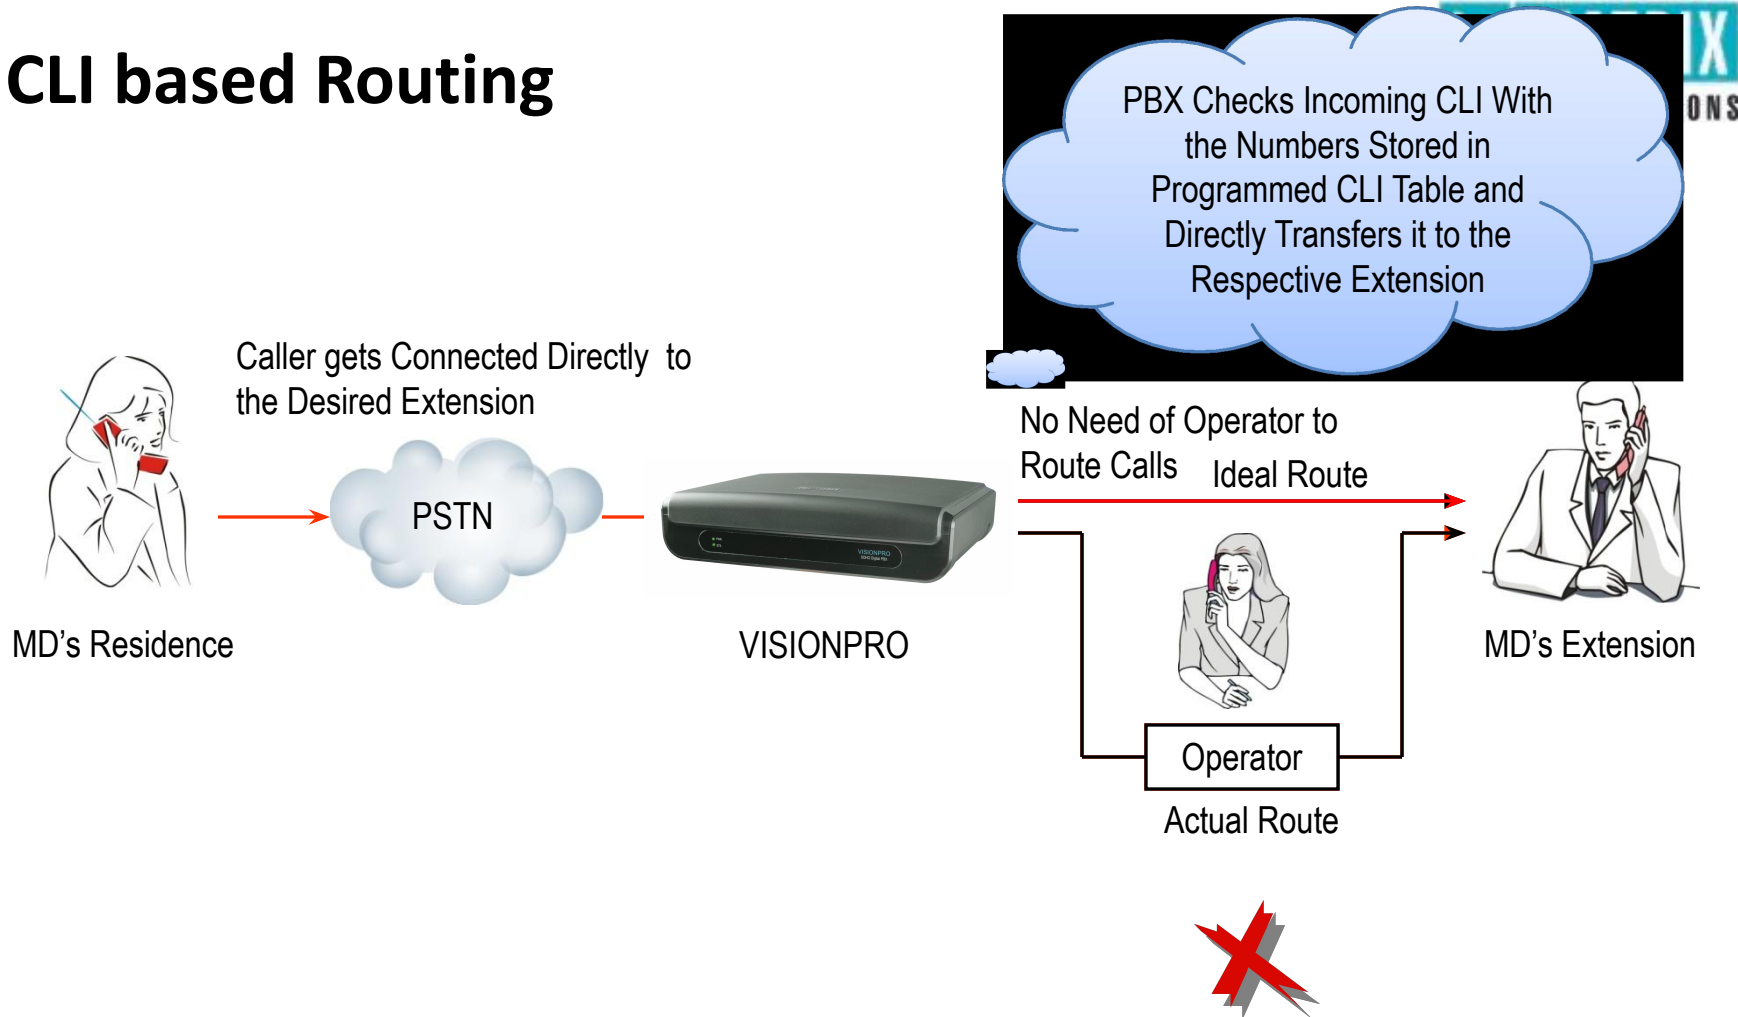

Scenario 1: Normal Routing

Scenario 2: CLI based Routing

External Call Forwarding

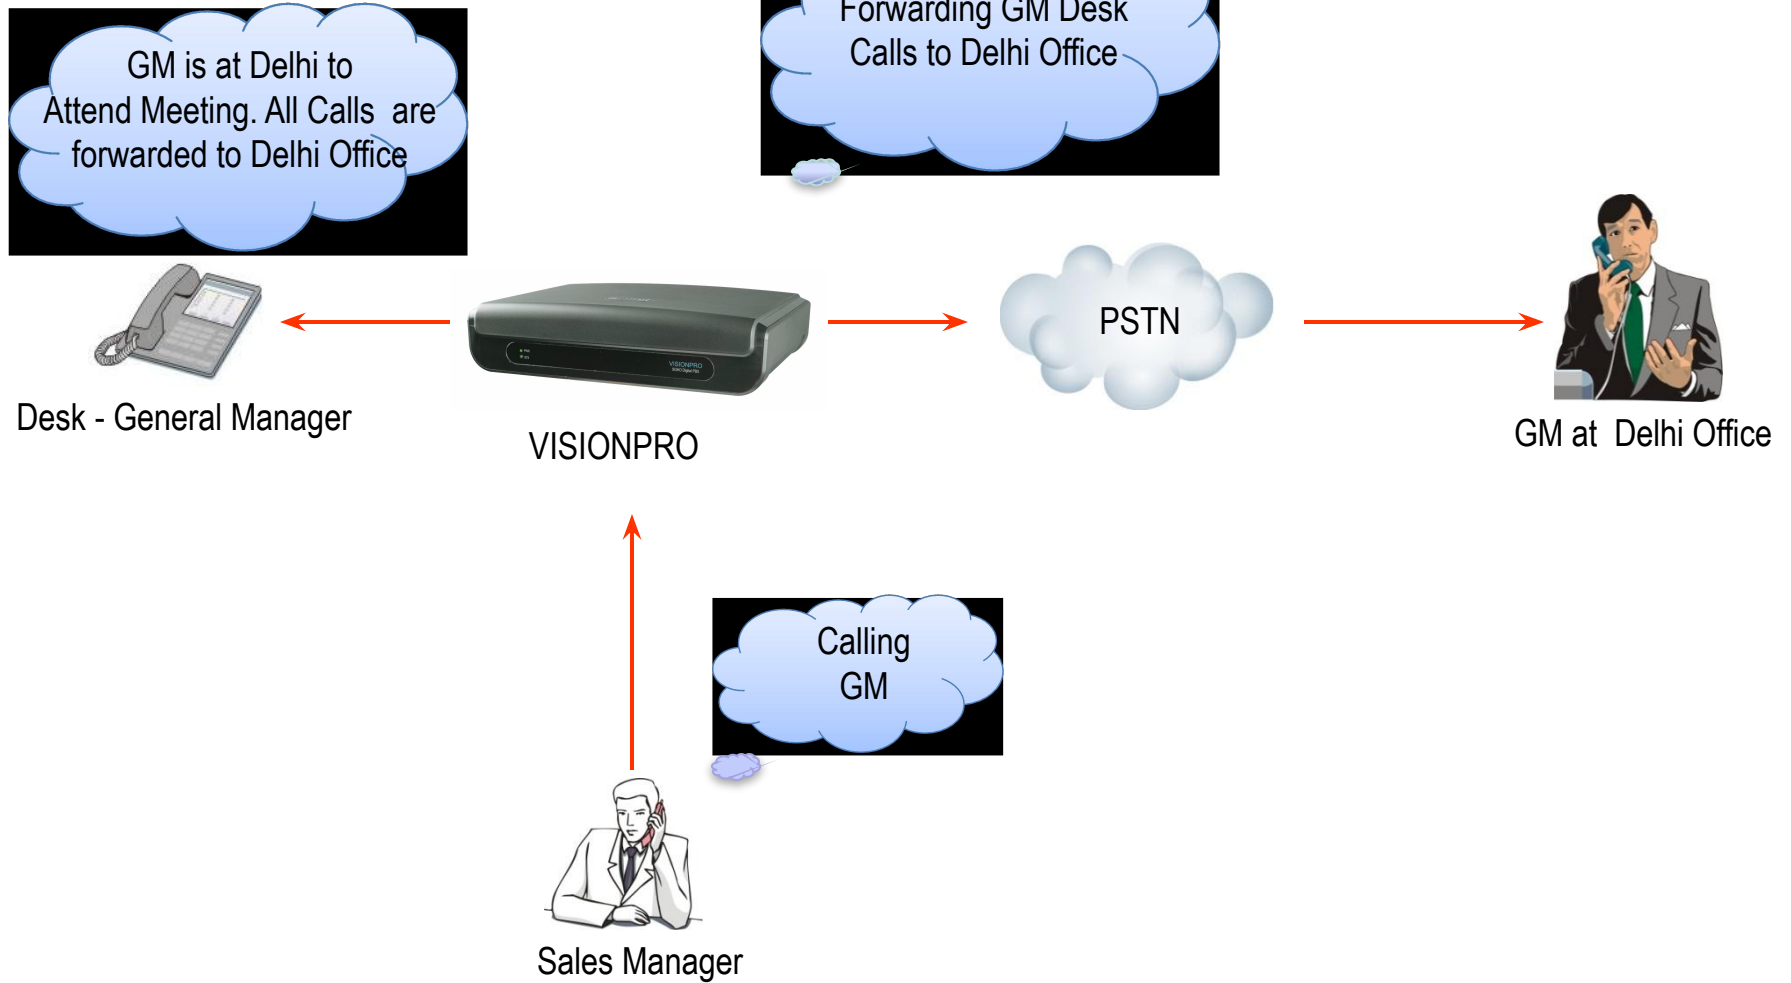

Dial-By-Name

- Enter Desired Person's Name In case Extension Number is not known
- Saves Operator's Time and Effort in transferring a Call

Live Call Supervision

- Get the information of calls Made/Received by an Extension being Supervised on your CLI Telephone
- Information can be Acquired During a Live Call on Need basis
- Very useful features for Organizations where Privacy is Essential



Voice Message Applications


- Day/Night Greetings
- Wrong Number Dial/Dial-by Name
- Initial Guidance
- Busy/Transfer/No Reply
- Store Messages Up to 240
Seconds with 16 Parts of 15
Seconds Each
- Message Can be Recorded from
Telephone or Music Source
- One Message is Played at One
Time
- Voice based Music-on-Hold
- Voice Greeting for Alarms
- Voice Guided help for DID and
DOSA
- Voice Message for Auto Redial
- Voice Message for Night Mode
- Voice Message for Emergency

Feature : Benefit



Auto-Attendant

Professional Call Handling

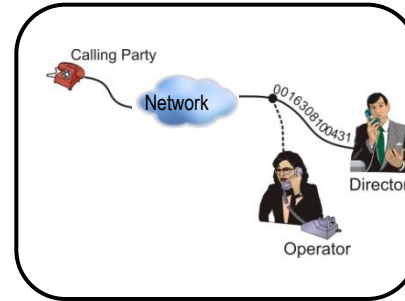


CLI Based Routing

Saves Time and makes Communication easy



Conference

Reduces Cost & Increases Productivity

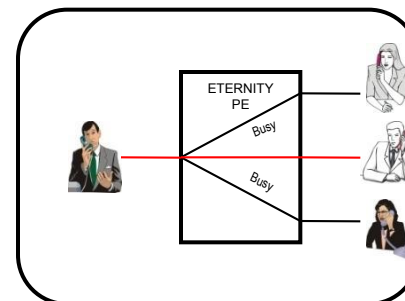

Alternate Number Dialing

Quick and Easy Dialing to Clients

Technical Specifications



SPECIFICATIONS	VISIONPRO206	VISIONPRO308	VISIONPRO412
Configuration			
Number of Trunks	2	3	4
Number of Extensions	6	8	12
Power Supply			
Input	External Adaptor 12 VDC @ 2A		
Power Consumption (Maximum)	19.2W	19.2W	28.44W
Mechanical			
Dimensions (WxHxD)	15.5 x 22.0 x 4.95cm (6.10"x8.66"x1.95")		
Unit Weight	Max. 0.65kg (1.43lbs)		
Shipping Weight	Max. 1.2kg (2.64lbs) Approx.		
Environment			
Operating Temperature	0 °C to 50 °C (32 °F to 122 °F)		
Operating Humidity	0-95%RH, Non-Condensing		

ORDERING INFORMATION



PRODUCT	DESCRIPTION
VISIONPRO206	Digital PBX with 2 Trunks and 6 Analog Extensions
VISIONPRO308	Digital PBX with 3 Trunks and 8 Analog Extensions
VISIONPRO412	Digital PBX with 4 Trunks and 12 Analog Extensions

Who Are We

1 Million+
Customers

2,500+
Partners

60+
Products

50+
Countries



Stay Tuned & Subscribe



@Matrix Comsec



MatrixComSec



@Matrix_Comsec



@MatrixComSec



www.MatrixTeleSol.com

THANK YOU!



www.MatrixComSec.com

We put
more
in the box

so your
business
can think
more
out of
the box.



Thank You.