### 2MP IR Dome Camera with 3.6mm Lens







2MP IR Dome Camera with 3.6mm Lens

Matrix Project Series Dome IP Cameras are built using superior components such as Sony STARVIS sensor and high MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying light conditions. Built in intelligent analytics including Motion Detection, Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.

### **USP**



SONY STARVIS SENSOR



H.265 COMPRESSION



IVA



HIGHER FIELD OF VIEW



SMART STREAMING



ADAPTIVE STREAMING



TRUE WDR



NAS

### **CERTIFICATION**

















Customer Care: (+91) 265 613 7222

E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com

## 2MP IR Dome Camera with 3.6mm Lens



TECHNICAL SPECIFICATIONS IMAGE SENSOR		
	1/2.8" SONY - CMOS 2MP Active Pixel	
Sensor Type and Size	Progressive Scan, Back Illuminated Image sensor (STARVIS Series)	
LENS		
	Color - 0.01 Lux @ F1.2 (AGC ON)	
Minimum Illumination	Monochrome - 0 Lux 3.6mm	
Focal Length		
Focus Range	0.3m to infinity	
	HFOV – 87.5°	
Field of Minn (FOM)	VFOV – 44.4°	
Field of View (FOV) Lens Mount	DFOV – 104.9° M12	
Focus	Fixed focus	
	F 1.6 / F 2.0	
Aperture (F#)	· ·	
Iris Type	Fixed	
IR Range	Up to 50m	
IR Led Wavelength	850nm	
IR Switching	Auto/ Manual	
	HARDWARE SPECIFICATIONS	
SD Card	Up to 512GB	
Camera Adjustment Angle	Pan - 0° to 330°	
	Tilt - 0° to 75°	
	Rotate - 0° to 180°	
IMAGE AND VIDEO		
No of Stream Profiles	4	
	Profile 1: 1920 x 1080p @30fps (H.265/H.264)	
	Profile 2: D1 @30fps (H.265/H.264) Profile 3: 1920 x 1080p @5fps (MJPEG)	
Stream Profiles	Profile 4: 720p @30fps (H.265/H.264/MJPEG)	
Available Resolutions	1920 x 1080, 720p, D1,2CIF, CIF, VGA	
Max Resolution	1920 x 1080	
Bitrate	128 kbps-8Mbps	
Bitrate Type	CBR, VBR	
Video Compression	H.265, H.264, MJPEG	
Frame Rate	1-30fps	
Franse Kale	1-201h2	

## 2MP IR Dome Camera with 3.6mm Lens



Shutter Speed	1/15s -1/100000s		
Adaptive Streaming	Yes		
ONVIF Profiles	Profile S and G		
Edge Recording	Yes		
Alarm Recording	Pre and Post		
Motion Recording	Yes		
Time Triggered	Yes		
Video Parameters	Snapshot, Region of Interest (ROI), BLC, Day/Night Settings		
Privacy Masks	3		
WDR	True WDR (120dB)		
SNR	71dB		
Image Enhancement	Saturation/ Contrast/ Sharpness/Brightness/Auto Exposure/HVS-Forensics/ Smart IR		
DNR	2D &3D		
Video Analytics	Motion Detection, Tamper Detection, Trip/No TripDetection, Object Intrusion/Zone Intrusion		
,	ALERTS		
IP Conflict	Yes		
Network Disconnect	Yes		
Storage Full	Yes		
	EVENTS AND ACTIONS		
Upload Image	SD, NAS, FTP		
Upload Clip	SD, NAS, FTP		
Notifications	E-mail, SMS, TCP		
	PROTOCOLS SUPPORTED		
Supported protocols	TCP/IP, HTTP, HTTPs, DSCP, QoS, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP, NTP, TLS/SSL, FTP, ICMP, IGMP, ARP, UDP, 802.1x, SNMP, UPnP, Bonjour, UDP		
Web Viewer	Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0		
Browser	IE, Chrome, Mozilla		
OPERATING PARAMETERS			
Power Supply	12V (DC); 802.3af (PoE)		
Power Consumption	Approximately 7W		
Operating Humidity	Less than 95% RH (non-condensing)		
Operating Temperature	-30°C to 60°C		
Storage Temperature	-30°C to 60°C		


### 2MP IR Dome Camera with 3.6mm Lens



PHYSICAL PARAMETERS		
Communication interface	10Base-T/100BaseTX Ethernet (RJ-45)	
Weight	1.41kg	
Color	Infinity White	
Dimensions	Ф158mm x 134mm	
Storage	NAS, SD Card	
Certifications	BIS, CE, IP67, FCC Part-15 Subpart - B, ONVIF S & G, IK10, UL, NEMA 4X	

<sup>\*</sup>Specifications are subject to change without prior notice\*

## **DIMENSIONS (in mm)**

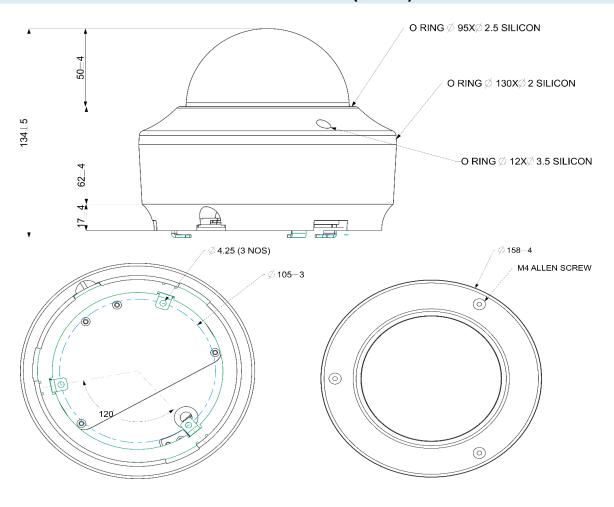

### 2MP IR Dome Camera with 3.6mm Lens



#### **ABOUT MATRIX**

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.



### **MATRIX COMSEC**

Head Office 394 – GIDC, Makarpura, Vadodara – 390 010, India.

Ph: +91 265 613 7222

E-mail: <a href="mailto:lnquiry@MatrixComSec.com">lnquiry@MatrixComSec.com</a>

#### Factory

19 – GIDC, Waghodia, Dist. Vadodara – 391 760, India. Ph: +91 265 613 7222

#### MATRIX COMSEC - North America

2 Wickstead Crt, Brampton, Ontario – L6R 1N8.

Ph: (+1) 408-643-0581 (USA) Ph: (+1) 437-266-1005 (Canada)

www.MatrixVideoSurveillance.com