256 Channel Enterprise NVR with 8 SATA Port





Matrix introduces its Enterprise Network Video Recorder – a turnkey server based Video Management and Surveillance solution for medium and large enterprises. Offering latest generation server grade and enterprise class hardware technology engineered with robust, open and scalable video management software. It is an ideal fit for enterprises that are looking for integrated video surveillance solution. Furthermore, smart features like perceptive monitoring and four levels of redundancy ensures a proactive, persistent and preventive security for your enterprise.

CERTIFICATION









KEY FEATURES



H.265 Compression



Interoperability



4K Decoding



Smart Monitoring



Redundant Power



Hot Swap HDD



12MP Recording



Integration





HARDWARE	TECHNICAL SPECIFICATIONS		
Processor - CPU			
Memory	Processor - CPLI		
OS Drive			
Sata 3.0 Channels 8	•		
Storage Capacity			
NAS			
Intel® UHD Graphics P630 Video Display 2x Display Ports; 1x VGA Chassis 2U, 17" Rack Mount Server Hot Swap HDD Bays 8x SATA HDD/SSD 3.5" or 2.5" RAID Intel® VRoC (Virtual RAID on CPU) RAID Support Hybrid RAID 0/1/5/10 NETWORK MANAGEMENT, INTERFACES AND SECURITY Network 4 X R.J45 (1 Gbps) Throughput (Uplink) 512Mbps Throughput (Downlink) 512Mbps Throughput (Downlink) 512Mbps Sensor In/ Alarm Out External COSEC PANEL 200P & COSEC ARC IO 800 Sensor Controller - Yes No Inbuilt RCA USB based external Mic and Speaker - Yes (Subject to additional supported Software Drivers) USB 1 (F) USB 2.0 + 4 (R) x USB 3.1 Security TPM 2.0 Support SSL Communication Reset Yes	<u> </u>		
Video Display 2x Display Ports; 1x VGA Chassis 2U, 17" Rack Mount Server Hot Swap HDD Bays 8x SATA HDD/ SSD 3.5" or 2.5" RAID Intel® VRoC (Virtual RAID on CPU) RAID Support Hybrid RAID 0/15/10 NETWORK MANAGEMENT, INTERFACES AND SECURITY Network 4 x R.145 (1 Gbps) Throughput (Uplink) 512Mbps Throughput (Downlink) 512Mbps Sensor In/ Alarm Out No Inbuilt Port. External COSEC PANEL 200P & COSEC ARC IO 800 Sensor Controller - Yes No Inbuilt RCA. USB based external Mic and Speaker - Yes. (Subject to additional supported Software Drivers) USB 1 (F) USB 2.0 + 4 (R) x USB 3.1 Security TPM 2.0 Support SSL Communication Reset Yes ELECTRICAL AND MECHANICAL Input Voltage 120/220 VAC at 50/60 Hz - Dual Input Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply Dimension (D x W x H) 26" x 16.9" x 3.5" Material SGCC Net Weight 13.9 kg (without HDD) SOFTWARE Operating System Microsoft Windows 10 IoT Enterprise </td <td></td> <td></td>			
Chassis			
Hot Swap HDD Bays		· · ·	
RAID			
RAID Support			
Network 4 X RJ45 (1 Gbps) Throughput (Uplink) 512Mbps Throughput (Downlink) 512Mbps Sensor In/ Alarm Out No Inbuilt Port. External COSEC PANEL 200P & COSEC ARC IO 800 Sensor Controller - Yes Audio In/ Out USB 2.0 + 4 (R) x USB 3.1 Security TPM 2.0 Support SSL Communication SSL Communication SSL Communication Reset Yes ELECTRICAL AND MECHANICAL Input Voltage 120/220 VAC at 50/60 Hz - Dual Input Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply Material SGCC Net Weight 13.9 kg (without HDD) SOFTWARE Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) VIDEO IP Camera Channels 256 IP Channels			
Network 4 X R,J45 (1 Gbps) Throughput (Uplink) 512Mbps Throughput (Downlink) 512Mbps Sensor In/ Alarm Out No Inbuilt Port. External COSEC PANEL 200P & COSEC ARC IO 800 Sensor Controller - Yes No Inbuilt RCA. USB based external Mic and Speaker - Yes. (Subject to additional supported Software Drivers) USB 1 (F) USB 2.0 + 4 (R) x USB 3.1 Security TPM 2.0 Support SSL Communication Reset Yes FLECTRICAL AND MECHANICAL Input Voltage 120/220 VAC at 50/60 Hz - Dual Input Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply Dimension (D x W x H) 660 x 430 x 88 (mm) 26" x 16.9" x 3.5" Material SGCC Net Weight 13.9 kg (without HDD) SOFTWARE Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Video Management Solution - SATATYA SAMAS VIDEO			
Throughput (Uplink) Throughput (Downlink) Sensor In/ Alarm Out No Inbuilt Port. External COSEC PANEL 200P & COSEC ARC IO 800 Sensor Controller - Yes No Inbuilt RCA. USB based external Mic and Speaker - Yes. (Subject to additional supported Software Drivers) USB 1 (F) USB 2.0 + 4 (R) x USB 3.1 TPM 2.0 Support SSL Communication Reset Yes ELECTRICAL AND MECHANICAL Input Voltage 120/220 VAC at 50/60 Hz - Dual Input Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply Dimension (D x W x H) 26" x 16.9" x 3.5" Material SGCC Net Weight 13.9 kg (without HDD) SOFTWARE Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Video Management Solution - SATATYA SAMAS VIDEO			
Throughput (Downlink) Sensor In/ Alarm Out Sensor In/ Alarm Out No Inbuilt Port. External COSEC PANEL 200P & COSEC ARC IO 800 Sensor Controller - Yes No Inbuilt RCA. USB based external Mic and Speaker - Yes. (Subject to additional supported Software Drivers) USB 1 (F) USB 2.0 + 4 (R) x USB 3.1 TPM 2.0 Support SSL Communication Reset Yes ELECTRICAL AND MECHANICAL Input Voltage 120/220 VAC at 50/60 Hz - Dual Input Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply Dimension (D x W x H) 660 x 430 x 88 (mm) 26" x 16.9" x 3.5" Material SGCC Net Weight 13.9 kg (without HDD) SOFTWARE Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Software Video Management Solution - SATATYA SAMAS VIDEO IP Camera Channels 256 IP Channels			
Sensor In/ Alarm Out No Inbuilt Port. External COSEC PANEL 200P & COSEC ARC IO 800 Sensor Controller - Yes No Inbuilt RCA. USB based external Mic and Speaker - Yes. (Subject to additional supported Software Drivers) USB 1 (F) USB 2.0 + 4 (R) x USB 3.1 TPM 2.0 Support SSL Communication Reset **ELECTRICAL AND MECHANICAL** Input Voltage 120/220 VAC at 50/60 Hz - Dual Input Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply Dimension (D x W x H) 660 x 430 x 88 (mm) 26" x 16.9" x 3.5" Material SGCC Net Weight 13.9 kg (without HDD) **SOFTWARE** Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Video Management Solution - SATATYA SAMAS **VIDEO**	- ' ' ' '		
External COSEC PANEL 200P & COSEC ARC IO 800 Sensor Controller - Yes No Inbuilt RCA. USB based external Mic and Speaker - Yes. (Subject to additional supported Software Drivers) USB 1 (F) USB 2.0 + 4 (R) x USB 3.1 Security TPM 2.0 Support SSL Communication Reset Yes ELECTRICAL AND MECHANICAL Input Voltage 120/220 VAC at 50/60 Hz - Dual Input Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply Dimension (D x W x H) 660 x 430 x 88 (mm) 26" x 16.9" x 3.5" Material SGCC Net Weight 13.9 kg (without HDD) SOFTWARE Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Video Management Solution - SATATYA SAMAS VIDEO IP Camera Channels 256 IP Channels	, ,	•	
Audio In/ Out USB based external Mic and Speaker - Yes. (Subject to additional supported Software Drivers) 1 (F) USB 2.0 + 4 (R) x USB 3.1 TPM 2.0 Support SSL Communication Reset Yes ELECTRICAL AND MECHANICAL Input Voltage 120/220 VAC at 50/60 Hz - Dual Input Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply 660 x 430 x 88 (mm) 26" x 16.9" x 3.5" Material SGCC Net Weight 13.9 kg (without HDD) SOFTWARE Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Software Video Management Solution - SATATYA SAMAS VIDEO	Sensor In/ Alarm Out	External COSEC PANEL 200P & COSEC ARC IO 800 Sensor Controller - Yes	
(Subject to additional supported Software Drivers) USB 1 (F) USB 2.0 + 4 (R) x USB 3.1 TPM 2.0 Support SSL Communication Reset Yes ELECTRICAL AND MECHANICAL Input Voltage 120/220 VAC at 50/60 Hz - Dual Input Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply Dimension (D x W x H) 660 x 430 x 88 (mm) 26" x 16.9" x 3.5" Material SGCC Net Weight 13.9 kg (without HDD) SOFTWARE Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Software Video Management Solution - SATATYA SAMAS VIDEO IP Camera Channels 256 IP Channels	Audia In/ Out		
USB 1 (F) USB 2.0 + 4 (R) x USB 3.1 Security TPM 2.0 Support SSL Communication Reset Yes ELECTRICAL AND MECHANICAL Input Voltage 120/220 VAC at 50/60 Hz - Dual Input Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply 660 x 430 x 88 (mm) 26" x 16.9" x 3.5" Material SGCC Net Weight 13.9 kg (without HDD) SOFTWARE Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Software Video Management Solution - SATATYA SAMAS VIDEO IP Camera Channels 256 IP Channels	Audio In/ Out		
Security TPM 2.0 Support SSL Communication Reset Yes ELECTRICAL AND MECHANICAL Input Voltage 120/220 VAC at 50/60 Hz - Dual Input Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply 660 x 430 x 88 (mm) 26" x 16.9" x 3.5" Material SGCC Net Weight 13.9 kg (without HDD) SOFTWARE Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Software Video Management Solution - SATATYA SAMAS VIDEO IP Camera Channels 256 IP Channels	USB	<u> </u>	
Reset Yes ELECTRICAL AND MECHANICAL Input Voltage 120/220 VAC at 50/60 Hz - Dual Input Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply 660 x 430 x 88 (mm) 26" x 16.9" x 3.5" Material SGCC Net Weight 13.9 kg (without HDD) SOFTWARE Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Video Management Solution - SATATYA SAMAS VIDEO IP Camera Channels 256 IP Channels	Security	TPM 2.0 Support	
Input Voltage 120/220 VAC at 50/60 Hz - Dual Input	-		
Input Voltage 120/220 VAC at 50/60 Hz - Dual Input Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply 660 x 430 x 88 (mm) 26" x 16.9" x 3.5" Material SGCC Net Weight 13.9 kg (without HDD) SOFTWARE Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Software Video Management Solution - SATATYA SAMAS VIDEO IP Camera Channels 256 IP Channels	Reset		
Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply 660 x 430 x 88 (mm) 26" x 16.9" x 3.5" Material SGCC Net Weight 13.9 kg (without HDD) SOFTWARE Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Software VIDEO IP Camera Channels 256 IP Channels			
Dimension (D x W x H) 660 x 430 x 88 (mm) 26" x 16.9" x 3.5" Material SGCC Net Weight 13.9 kg (without HDD) SOFTWARE Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Video Management Solution - SATATYA SAMAS VIDEO IP Camera Channels 256 IP Channels		*	
Material SGCC Net Weight 13.9 kg (without HDD) SOFTWARE Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Software Video Management Solution - SATATYA SAMAS VIDEO IP Camera Channels 256 IP Channels	Power Supply System		
Material SGCC Net Weight 13.9 kg (without HDD) SOFTWARE Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Software Video Management Solution - SATATYA SAMAS VIDEO IP Camera Channels 256 IP Channels	Dimension (D x W x H)		
SOFTWARE Operating System	Material	SGCC	
Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Software Video Management Solution - SATATYA SAMAS VIDEO IP Camera Channels 256 IP Channels	Net Weight	13.9 kg (without HDD)	
Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Software Video Management Solution - SATATYA SAMAS VIDEO IP Camera Channels 256 IP Channels			
Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Software Video Management Solution - SATATYA SAMAS VIDEO IP Camera Channels 256 IP Channels	Operating System		
Software Video Management Solution - SATATYA SAMAS VIDEO IP Camera Channels 256 IP Channels		Microsoft SQL Server Express Edition (upto 10 GB of Storage)	
VIDEO IP Camera Channels 256 IP Channels	Software		
	·		
Resolution Support 12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIF	IP Camera Channels	256 IP Channels	
	Resolution Support	12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIF	
Compression H.265, H.264, MJPEG			
ONVIF Profile Support ONVIF Profile S & G	•		



256 Channel Enterprise NVR with 8 SATA Port

IP Camera Supports	Matrix IP Camera, Third Party – ONVIF Profile S Supported (V2.2 and above)	
Active Directory Support	Yes	
User Roles and Rights	Yes	
DISPLAY		
Smart Client Layout	1x1, 2x2, 3x3, 4x4, 5x5, 6x6, 8x8, 1+3, 1+5, 1+7 and Sequential Views and Windows Sequence	
Local Decoding	1x 4K/ 4x 1080P/ 16 x D1 @H.264	
Digital Zoom on Live	Yes	
Snapshot	Yes	
OSD	Channel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)	
	RECORDING AND STREAMING	
Simultaneous Login	Default: 5 Max: 99+1 (Admin), users can be added with additional license	
Pre-Record	Up to 30 Sec	
Post-Record	1 Day	
Snapshot Format	JPEG	
Recording Format	Native	
Recording Types	Continuous, Manual, Motion, Schedule, Adaptive, Event Activated Recording	
Special Recording	Time Lapse Recording and Day-Highlights	
Adaptive Recording	Automatically Reduces the Number of Frames Captured Per Second Where There is No Motion, Thereby Saving Storage Space	
Stream Configuration	Stream Parameters, CODEC, Resolution, FPS and GOP	
Stream Usages	Recording, Viewing, Analytics	
FPS	1-60fps	
GOP	1-120 GOP	
INTEGRATED PLATFORMS (Ethernet/Network)		
Redundant Service	Yes Storage & Recording Services (N+1)	
Failover Service	Yes Storage & Recording Services (N+1) & Network ISP Service (1+1)	
Matrix IVA Service	Yes (Basic & Advance IVAs, ANPR, Parking Management & More)	
Business Application	SAP, ERP and POS	
Access Control System	Yes Matrix COSEC Server and COSEC PANEL LITE for Aux I/O Integrations	
Streaming Services	Yes For Integrations with Third Party IVA and Investigation Agency	
E-NVR Clients	Desktop Client: SATATYA Smart Client, Video Wall Client Mobile Clients for Android and iOS Devices	
PLAYBACK AND BACKUP		
Synchronous Playback	16 channels @ 1080P (via Ethernet), 4 Channels @1080P (Local Display)	
Search Mode	Date and Time, Camera, Recording Type	
Playback Modes	Fast Forward (upto 16x), Fast Reverse (upto -16x), Next Frame, Previous Frame	
Backup and Archive	3 Levels, Video Grooming Technology	






Backup Location	Local Removal Drive, NAS, FTP	
Maximum User	Default: 10 Max: 999, users can be added with additional license	
Remote Operation	Monitor, PTZ Control, Playback, System Setting, File Download, Log Information	
PERCEPTIVE MONITORING		
Hierarchical E-map	Yes	
Alarm Management	Yes (Report, Acknowledge, Close & Alarm Logs)	
System Health Dashboard	Yes	
Investigator	Video Content Analysis on Recorded Video (Over Network Client)	
One Click Control	IPC view, Recording Status, Health, Snapshot, Manual Recording, Digital Zoom In and Out, Change Stream, Share Live View	
On Screen PTZ Control	Yes, using Virtual PTZ Joystick	
SURVEILLANCE LOGS		
Logs	Event Logs, Audit Trails, Alarm Logs and Online User information	
Reports	Summary Report, Downtime Analysis Report, Evidence Reports, System Health Reports	
Report Scheduler	Yes (Daily, Weekly, Monthly)	
EVENTS AND ACTION		
Events	Video Surveillance Events, System Events, User Events, Audit Trails Events	
Action	Recording on Selected Channel, Upload Images on FTP/Email server, Email Notification with Snapshot, Trigger IVA, Recall PTZ Preset Position, Turn On/Off Alarm Outputs, Buzzer Notification, SMS Notification, Calling from Mobile App, Share files data, Trigger Aux Output	

NOTE 1: Installing the product you also adhere to Microsoft's Software License terms for Microsoft Windows IoT product usage terms as well as Microsoft and Matrix's CLA Terms, as the product includes an embedded Microsoft Windows Operating System. For more details, please refer to Matrix's <u>EULA</u> respecting the said product/solution.

NOTE 2: Technical Specifications are subject to change without prior notice.

DIMENSIONS (in mm)

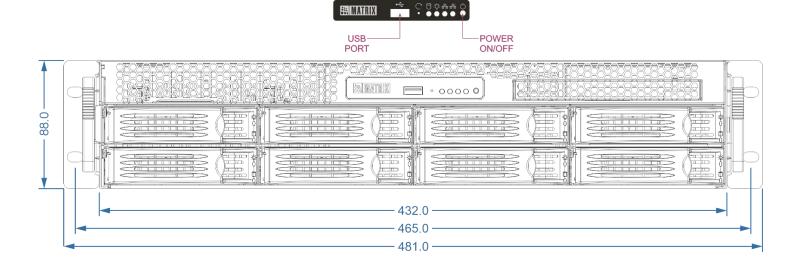

^{*}The storage capacity of E-NVR depends on the number of hard drives installed in the device.*

256 Channel Enterprise NVR with 8 SATA Port



ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa, and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.



MATRIX COMSEC

Head Office 394-GIDC, Makarpura, Vadodara-390010, India.

Ph: +91 265-613-7222

E-mail: Inquiry@MatrixComSec.com

Factory

19-GIDC, Waghodia, Dist. Vadodara-391 760, India.

Ph: +91 265-613-7222

MATRIX COMSEC - North America

2 Wickstead Crt, Brampton, Ontario, L6R 1N8. +1 408-643-0581 (USA) +1 437-266-1005 (Canada)

www.MatrixComScom