32 Channel NVR with 2 SATAPort







Compression: H.265

• Decoding: 4K

Channel: 32 Channels

Storage: 2 SATA Port (10TB each)

Throughput: 512Mbps

Matrix NVRs are packed with high end processors to deliver all the functionalities like high resolution recording, playback, simultaneous local and remote monitoring along with storing for higher number of days. Furthermore, these latest NVRs are also backed with an intelligent software to detect threats and send instant notifications for real-time security.

All in all, these comprehensive, flexible, reliable, integrated NVRs provide a proficient, persistent and a preventive security solution suitable for enterprises and multi-location offices.

KEY FEATURES



H.265 Compression



4K Decoding



12MP Recording



Cascading



Adaptive Recording



Camera-wise Recording Retension

CERTIFICATION











Customer Care: +91 265-613-7222 E-mail: Inquiry@MatrixComSec.com www,MatrixComSec.com

32 Channel NVR with 2 SATAPort



TECHNICAL SPECIFICATIONS		
VIDEO		
Input	32 IP Channels	
Output	HDMI (2.0) – 1 Port (Main)	
Compression	H.265/H.264/Motion JPEG	
Cop. cos.c	AUDIO	
Input	1 Channel, RCA Port(2.0Vp-p), Range (-2dBu to 22dBu)	
Output	1 Channel, RCA Port Mono, Unbalanced Output, (2.0Vp-p),	
σαιραι	Range (-2dBu to 22dBu)	
Compression	G.711μ	
Two Way Audio	Yes	
,	THROUGHPUT	
Downlink Throughput	256Mbps	
	Following Scenarios are Considered:	
	1. Cameras Streaming to Device	
	2. Cameras of Cascaded Devices being Viewed on Local	
	3. Streaming from NAS for local/Web Client	
Uplink Throughput	256Mbps	
	Following Scenarios are Considered:	
	1. Cameras Streaming to Web Client	
	2. Storage or Backup to NAS	
Simultaneous Log-in	9+1(Admin)	
ū	DISPLAY	
Split (Through LAN/HDMI)	1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5,	
Sp.:.e (6x6,	
	8x8 and Sequential	
Local Decoding	4x 4K/ 10x 3MP/ 16x 1080P/ 64 x D1	
Snapshot	Yes	
Multiple Camera Viewing	Through Cascading (up to 20 Devices)	
OSD	Channel Number and Name, Status, Video Loss, Recording and Disabled	
	Channel (As per camera support)	
RECORDING		
Image Resolution	12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, CIF	
Pre-Record	Up to 30 Sec	
Post-Record	10-300 Sec	
Snapshot Format	JPEG	
Recording Format	Native	
Recording Types	Scheduled, Manual, Alarm and COSEC	
	STORAGE AND BANDWIDTH	
OPTIMIZATON		
Adaptive Recording	Automatically Reduces the Number of Frames Captured Per Second	
D. I. M.	Where There is No Motion, Thereby Saving Storage Space	
Bandwidth	Automatically Adapts Optimized Resolution on Local Display Through	
	PLAYBACK AND BACKUP	
Synchronous Playback	16 Channels @ 1080P (via HDMI)	
Synchionous Flayback	TO CHAILIEIS (W TOOOF (VIA HDIVII)	

Customer Care: +91 265-613-7222 E-mail: Inquiry@MatrixComSec.com www.MatrixComSec.com

32 Channel NVR with 2 SATAPort



Search Mode	Date and Time, Camera, Recording Type, Recording Drive	
Playback Modes	Fast Forward, Slow Forward, Slow Reverse, Fast Reverse at Different	
i layback ivioucs	Speed Control, Next-Previous Frame	
Backup	Manual Backup over USB and NAS	
Buckup	Scheduled Backup over USB, NAS and FTP	
	Scheduled Backup over USB through USB2.0 interface	
	Manual Backup over USB through USB3.0 interface	
	Quick Backup over USB, NAS and Local PC	
Configuration Backup	Yes	
Network Functions	TCP/IP, DHCP, PPPOE, DDNS, Free Matrix DNS, FTP, SMTP, NTP,	
	RTP/RTSP,	
	CIFS/NFS, Network Acceleration, UDP	
Maximum User	120	
Remote Operation	Monitor, PTZ Control, Playback, System Setting, File Download, Log	
	Information, Upgrade	
EVENTS AND ACTION		
Trigger Events	Motion Detection, View Tampering, Trip Wire, Object Intrusion, Audio	
	Exception, Missing Object, Suspicious Object, Loitering, Object Counting,	
	Recording Start, Recording Fail, Camera Offline, Camera Online	
System Events	Manual Trigger, On Boot Alarm, Storage Alert, Disk Volume Full, Disk	
	Fault, Scheduled Backup Fail	
Actions	Recording on Selected Channel, Upload Images on FTP/Email server,	
	Email Notification with Snapshot, TCP Notification, Recall PTZ Preset	
	Position, Turn On/Off Alarm Outputs, Buzzer Notification, SMS Notification, Calling from Mobile App	
	STORAGE INTERFACE	
SATA Interface	2 SATA III (10TB per port)	
NAS	2 NAS (CIFS, NFS)	
USB	1 TB USB Drive	
RAID	RAID-0, RAID-1	
Retention	Camera wise, HDD usage % wise, Day wise	
INTERFACES		
Network Interface	2 Ports x Ethernet (RJ-45) 10/100/1000Mbps	
USB	3 Ports (1x USB 3.0, 2x USB2.0)	
LED	System Status LED, Power LED	
Alarm Input	2	
Alarm Output	1	
Reset Switch	Yes	
Buzzer	Yes	
DALLCI	SYSTEM INTERFACE	
Processor	ARM Cortex A17 Quad-Core	
RAM	4GB	
Flash	2GB	
OS	Embedded Linux	
Control Mode	Mouse, Web Client and Mobile Client	
CAMERA SUPPORT		
Third Party Camera	Cameras with ONVIF 2.0 and above	
,	1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	


Customer Care: +91 265-613-7222 E-mail: Inquiry@MatrixComSec.com www.MatrixComSec.com

32 Channel NVR with 2 SATAPort



Support		
ENVIRONMENT CONDITIONS		
Operating Temperature	0°C to +50°C (32°F to 122°F)	
Humidity Range	5% to 95% RH Non-Condensing.	
ELECTRICAL AND MECHANICAL		
Power Input	12VDC, 5A	
Dimension(W×H×D)	425.5 (without clamp) × 54.6 × 196	
Weight (Kg)	1.68kg	

^{*}Specifications are subject to change without prior notification

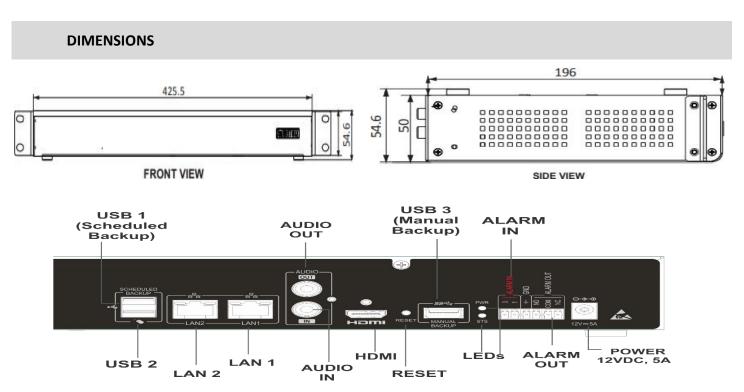

Customer Care: +91 265-613-7222 E-mail: Inquiry@MatrixComSec.com www.MatrixComSec.com

32 Channel NVR with 2 SATAPort



ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.



MATRIX COMSEC

Head Office 394-GIDC, Makarpura, Vadodara-390 010, India. Ph: +91 265-613-7222

E-mail: Inquiry@MatrixComSec.com

Factory 19-GIDC, Waghodia, Dist. Vadodara-391 760, India.

Ph: +91 265-613-7222

MATRIX COMSEC - North America

2 Wickstead Crt, Brampton, Ontario, L6R 1N8. +1 408-643-0581 (USA) +1 437-266-1005 (Canada)

www.MatrixComSec.com

Customer Care: +91 265-613-7222 E-mail: Inquiry@MatrixComSec.com www,MatrixComSec.com