32 Channel Enterprise NVR with 8 SATA Port





Matrix introduces its Enterprise Network Video Recorder – a turnkey server based Video Management and Surveillance solution for medium and large enterprises. Offering latest generation server grade and enterprise class hardware technology engineered with robust, open and scalable video management software. It is an ideal fit for enterprises that are looking for integrated video surveillance solution. Furthermore, smart features like perceptive monitoring and four levels of redundancy ensures a proactive, persistent and preventive security for your enterprise.

#### **CERTIFICATION**









### **KEY FEATURES**



H.265 Compression



Interoperability



4K Decoding



**Smart Monitoring** 



Redundant Power



Hot Swap HDD



12MP Recording



Integration

# 32 Channel Enterprise NVR with 8 SATA Port



HARDWARE	TECHNICAL SPECIFICATIONS		
Processor - CPU			
Memory	Processor - CPU		
OS Drive			
SATA 3.0 Channels         8           Storage Capacity         Max 144 TB*           NAS         Upto 19 NAS           GPU         Intel® UHD Graphics P630           Video Display         2x Display Ports; 1x VGA           Chassis         2U, 17* Rack Mount Server           Hot Swap HDD Bays         8x SATA HDD/ SSD 3.5* or 2.5*           RAID         Intel® VRoC (Virtual RAID on CPU)           RAID Support         Hybrid RAID 0/1/5/10           NETWORK MANAGEMENT, INTERFACES AND SECURITY           Network         4 X R.J45 (1 Gbps)           Throughput (Uplink)         512Mbps           Throughput (Downlink)         512Mbps           Throughput (Downlink)         512Mbps           Sensor In/ Alarm Out         External COSEC PANEL 200P & COSEC ARC IO 800 Sensor Controller - Yes           No Inbuilt RCA.         USB based external Mic and Speaker - Yes.           (Subject to additional supported Software Drivers)         USB           USB         1 (F) USB 2.0 + 4 (R) x USB 3.1           Security         TPM 2.0 Support           Security         TPM 2.0 Support           SEL Communication         SEL Communication           Reset         Yes           ELECTRICAL AND MECHANICAL           Input	-		
Storage Capacity		+	
NAS         Upto 19 NAS           GPU         Intel® UHD Graphics P630           Video Display         2x Display Ports; 1x VGA           Chassis         2U, 17" Rack Mount Server           Hot Swap HDD Bays         8x SATA HDD/ SSD 3.5" or 2.5"           RAID         Intel® VRoC (Virtual RAID on CPU)           RAID Support         Hybrid RAID 0/1/5/10           NETWORK MANAGEMENT, INTERFACES AND SECURITY           Network         4 x R.J45 (1 Gbps)           Throughput (Uplink)         512Mbps           Throughput (Downlink)         512Mbps           Sensor In/ Alarm Out         External COSEC PANEL 200P & COSEC ARC 10 800 Sensor Controller - Yes           No Inbuilt Port. External COSEC PANEL 200P & COSEC ARC 10 800 Sensor Controller - Yes           No Inbuilt RCA.         USB Based external Mic and Speaker - Yes. (Subject to additional supported Software Drivers)           USB         1 (F) USB 2.0 + 4 (R) x USB 3.1           Security         TPM 2.0 Support SSL Communication           Reset         Yes           ELECTRICAL AND MECHANICAL           Input Voltage         120/220 VAC at 50/60 Hz - Dual Input           Power Supply System         1+1 550W Hot Swap Platinum Redundant Power Supply           Dimension (D x W x H)         26" x 16.9" x 3.5"			
GPU         Intel® UHD Graphics P630           Video Display         2x Display Ports; 1x VGA           Chassis         2U, 17" Rack Mount Server           Hot Swap HDD Bays         8x SATA HDD/ SSD 3.5" or 2.5"           RAID         Intel® VRoC (Virtual RAID on CPU)           RAID Support         Hybrid RAID 0/1/5/10           NETWORK MANAGEMENT, INTERFACES AND SECURITY           Network         4 X R.145 (1 Glops)           Throughput (Uplink)         512Mbps           Throughput (Downlink)         512Mbps           Throughput (Downlink)         512Mbps           Sensor In/ Alarm Out         No Inbuilt Port. External COSEC PANEL 200P & COSEC ARC IO 800 Sensor Controller - Yes           No Inbuilt RCA. USB based external Mic and Speaker - Yes. (Subject to additional supported Software Drivers)           USB         1 (F) USB 2.0 + 4 (R) x USB 3.1           Feeurity         TPM 2.0 Support SSL Communication           Reset         Yes           ELECTRICAL AND MECHANICAL           Input Voltage         120/220 VAC at 50/60 Hz - Dual Input           Power Supply System         1+1 550W Hot Swap Platinum Redundant Power Supply           Dimension (D x W x H)         660 x 430 x 88 (mm) 26" x 16.9" x 3.5"           Material         SGCC           Net Weight <t< td=""><td></td><td></td></t<>			
Video Display         2x Display Ports; 1x VGA           Chassis         2U, 17" Rack Mount Server           Hot Swap HDD Bays         8x SATA HDD/ SSD 3.5" or 2.5"           RAID         Intel® VRoC (Virtual RAID on CPU)           RAID Support         Hybrid RAID 0/1/5/10           NETWORK MANAGEMENT, INTERFACES AND SECURITY           Network           4 X RJ45 (1 Gbps)           Throughput (Uplink)         512Mbps           Throughput (Downlink)         512Mbps           Sensor In/ Alarm Out         No Inbuilt Port. External COSEC PANEL 200P & COSEC ARC IO 800 Sensor Controller - Yes           Audio In/ Out         USB based external Mic and Speaker - Yes. (Subject to additional supported Software Drivers)           USB         1 (F) USB 2.0 + 4 (R) x USB 3.1           Security         TPM 2.0 Support SSL Communication           Reset         Yes           ELECTRICAL AND MECHANICAL           Input Voltage         120/220 VAC at 50/60 Hz - Dual Input           Power Supply System         1+1 550W Hot Swap Platinum Redundant Power Supply           Dimension (D x W x H)         260 x 430 x 88 (rm) 260 x 16.9" x 3.5"           Material         SGCC           Net Weight         13.9 kg (without HDD)           SOFTWARE           Opera		- '	
Chassis   2U, 17" Rack Mount Server		·	
Hot Swap HDD Bays		· · ·	
RAID		· ·	
RAID Support	·		
NETWORK MANAGEMENT, INTERFACES AND SECURITY  Network 4 X RJ45 (1 Gbps)  Throughput (Uplink) 512Mbps  Throughput (Downlink) 512Mbps  Sensor In/ Alarm Out No Inbuilt Port. External COSEC PANEL 200P & COSEC ARC IO 800 Sensor Controller - Yes  Audio In/ Out Sensor In/ Alarm Out External Mic and Speaker - Yes. (Subject to additional supported Software Drivers)  USB 1 (F) USB 2.0 + 4 (R) x USB 3.1  TPM 2.0 Support SSL Communication  Reset Yes  ELECTRICAL AND MECHANICAL  Input Voltage 120/220 VAC at 50/60 Hz - Dual Input  Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply  Dimension (D x W x H) 660 x 430 x 88 (mm) 26" x 16.9" x 3.5"  Material SGCC  Net Weight 13.9 kg (without HDD)  SOFTWARE  Operating System Microsoft Windows 10 IoT Enterprise  Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage)  Video Management Solution - SATATYA SAMAS  PC Compression H.265, H.264, MJPEG	RAID Support		
Network         4 X RJ45 (1 Gbps)           Throughput (Uplink)         512Mbps           Throughput (Downlink)         512Mbps           Sensor In/ Alarm Out         No Inbuilt Port. External COSEC PANEL 200P & COSEC ARC IO 800 Sensor Controller - Yes           Audio In/ Out         No Inbuilt RCA. USB based external Mic and Speaker - Yes. (Subject to additional supported Software Drivers)           USB         1 (F) USB 2.0 + 4 (R) x USB 3.1           Security         TPM 2.0 Support SSL Communication           Reset         Yes           ELECTRICAL AND MECHANICAL           Input Voltage         120/220 VAC at 50/60 Hz - Dual Input           Power Supply System         1+1 550W Hot Swap Platinum Redundant Power Supply           Dimension (D x W x H)         660 x 430 x 88 (mm) 26" x 16.9" x 3.5"           Material         SGCC           Net Weight         13.9 kg (without HDD)           SOFTWARE           Operating System         Microsoft Windows 10 IoT Enterprise           Event Database         Microsoft SQL Server Express Edition (upto 10 GB of Storage)           Software         Video Management Solution - SATATYA SAMAS           VIDEO           IP Camera Channels         32 IP Channels           Resolution Support         12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIF			
Throughput (Uplink)  Throughput (Downlink)  Sensor In/ Alarm Out  No Inbuilt Port. External COSEC PANEL 200P & COSEC ARC IO 800 Sensor Controller - Yes  No Inbuilt RCA.  Audio In/ Out  USB based external Mic and Speaker - Yes. (Subject to additional supported Software Drivers)  USB  1 (F) USB 2.0 + 4 (R) x USB 3.1  TPM 2.0 Support  SSL Communication  Reset  Yes  ELECTRICAL AND MECHANICAL  Input Voltage  120/220 VAC at 50/60 Hz - Dual Input  Power Supply System  1+1 550W Hot Swap Platinum Redundant Power Supply  Dimension (D x W x H)  660 x 430 x 88 (mm) 26" x 16.9" x 3.5"  Material  SGCC  Net Weight  13.9 kg (without HDD)  SOFTWARE  Operating System  Microsoft Windows 10 IoT Enterprise  Event Database  Microsoft SQL Server Express Edition (upto 10 GB of Storage)  Video Management Solution - SATATYA SAMAS  VIDEO  IP Camera Channels  Resolution Support  12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF, CIF, QCIF  Compression  H.265, H.264, MJPEG			
Throughput (Downlink)  Sensor In/ Alarm Out  No Inbuilt Port. External COSEC PANEL 200P & COSEC ARC IO 800 Sensor Controller - Yes  No Inbuilt RCA.  USB based external Mic and Speaker - Yes. (Subject to additional supported Software Drivers)  USB  1 (F) USB 2.0 + 4 (R) x USB 3.1  TPM 2.0 Support SSL Communication  Reset  Yes  ELECTRICAL AND MECHANICAL  Input Voltage  120/220 VAC at 50/60 Hz - Dual Input  Power Supply System  1+1 550W Hot Swap Platinum Redundant Power Supply  Dimension (D x W x H)  660 x 430 x 88 (mm) 26" x 16.9" x 3.5"  Material  SGCC  Net Weight  13.9 kg (without HDD)  SOFTWARE  Operating System  Microsoft Windows 10 IoT Enterprise  Event Database  Microsoft SQL Server Express Edition (upto 10 GB of Storage)  Video Management Solution - SATATYA SAMAS  VIDEO  IP Camera Channels  Resolution Support  12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF, CIF, QCIF Compression  H.265, H.264, MJPEG	Throughput (Uplink)		
Sensor In/ Alarm Out    No Inbuilt Port	<u> </u>	-	
Audio In/ Out USB based external Mic and Speaker - Yes. (Subject to additional supported Software Drivers)  1 (F) USB 2.0 + 4 (R) x USB 3.1  TPM 2.0 Support SSL Communication  Reset Yes  ELECTRICAL AND MECHANICAL  Input Voltage 120/220 VAC at 50/60 Hz - Dual Input  Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply  Dimension (D x W x H) 660 x 430 x 88 (mm) 26" x 16.9" x 3.5"  Material SGCC  Net Weight 13.9 kg (without HDD)  SOFTWARE  Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage)  Software Video Management Solution - SATATYA SAMAS  VIDEO  IP Camera Channels Resolution Support 12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF, CIF, QCIF Compression H.265, H.264, MJPEG		No Inbuilt Port.	
USB         1 (F) USB 2.0 + 4 (R) x USB 3.1           Security         TPM 2.0 Support SSL Communication           Reset         Yes           ELECTRICAL AND MECHANICAL           Input Voltage         120/220 VAC at 50/60 Hz - Dual Input           Power Supply System         1+1 550W Hot Swap Platinum Redundant Power Supply           Dimension (D x W x H)         660 x 430 x 88 (mm) 26" x 16.9" x 3.5"           Material         SGCC           Net Weight         13.9 kg (without HDD)           SOFTWARE           Operating System         Microsoft Windows 10 loT Enterprise           Event Database         Microsoft SQL Server Express Edition (upto 10 GB of Storage)           Software         Video Management Solution - SATATYA SAMAS           VIDEO           IP Camera Channels         32 IP Channels           Resolution Support         12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF, CIF, QCIF           Compression         H.265, H.264, MJPEG	Audio In/ Out	USB based external Mic and Speaker - Yes.	
SSL Communication           Reset         Yes           ELECTRICAL AND MECHANICAL           Input Voltage         120/220 VAC at 50/60 Hz - Dual Input           Power Supply System         1+1 550W Hot Swap Platinum Redundant Power Supply           Dimension (D x W x H)         660 x 430 x 88 (mm) 26" x 16.9" x 3.5"           Material         SGCC           Net Weight         13.9 kg (without HDD)           SOFTWARE           Operating System         Microsoft Windows 10 loT Enterprise           Event Database         Microsoft SQL Server Express Edition (upto 10 GB of Storage)           Software         Video Management Solution - SATATYA SAMAS           VIDEO           IP Camera Channels         32 IP Channels           Resolution Support         12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIF           Compression         H.265, H.264, MJPEG	USB		
Input Voltage   120/220 VAC at 50/60 Hz - Dual Input	Security	, , , , , , , , , , , , , , , , , , ,	
Input Voltage 120/220 VAC at 50/60 Hz - Dual Input Power Supply System 1+1 550W Hot Swap Platinum Redundant Power Supply Dimension (D x W x H) 660 x 430 x 88 (mm) 26" x 16.9" x 3.5"  Material SGCC Net Weight 13.9 kg (without HDD)  SOFTWARE  Operating System Microsoft Windows 10 IoT Enterprise Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage) Software Video Management Solution - SATATYA SAMAS  VIDEO  IP Camera Channels 32 IP Channels Resolution Support 12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIF Compression H.265, H.264, MJPEG	Reset	Yes	
Power Supply System  1+1 550W Hot Swap Platinum Redundant Power Supply  660 x 430 x 88 (mm) 26" x 16.9" x 3.5"  Material  SGCC  Net Weight  13.9 kg (without HDD)  SOFTWARE  Operating System  Microsoft Windows 10 IoT Enterprise  Event Database  Microsoft SQL Server Express Edition (upto 10 GB of Storage)  Video Management Solution - SATATYA SAMAS  VIDEO  IP Camera Channels  Resolution Support  12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIF  Compression  H.265, H.264, MJPEG	ELECTRICAL AND MECHANICAL		
Dimension (D x W x H)  660 x 430 x 88 (mm) 26" x 16.9" x 3.5"  Material  SGCC  Net Weight  13.9 kg (without HDD)  SOFTWARE  Operating System  Microsoft Windows 10 IoT Enterprise  Event Database  Microsoft SQL Server Express Edition (upto 10 GB of Storage)  Video Management Solution - SATATYA SAMAS  VIDEO  IP Camera Channels  Resolution Support  12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIF Compression  H.265, H.264, MJPEG	Input Voltage	120/220 VAC at 50/60 Hz - Dual Input	
Material SGCC  Net Weight 13.9 kg (without HDD)  SOFTWARE  Operating System Microsoft Windows 10 IoT Enterprise  Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage)  Software Video Management Solution - SATATYA SAMAS  VIDEO  IP Camera Channels 32 IP Channels  Resolution Support 12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIF  Compression H.265, H.264, MJPEG	Power Supply System	1+1 550W Hot Swap Platinum Redundant Power Supply	
Net Weight 13.9 kg (without HDD)  SOFTWARE  Operating System Microsoft Windows 10 IoT Enterprise  Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage)  Software Video Management Solution - SATATYA SAMAS  VIDEO  IP Camera Channels 32 IP Channels  Resolution Support 12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIF  Compression H.265, H.264, MJPEG	Dimension (D x W x H)	660 x 430 x 88 (mm) 26" x 16.9" x 3.5"	
SOFTWARE  Operating System Microsoft Windows 10 IoT Enterprise  Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage)  Software Video Management Solution - SATATYA SAMAS  VIDEO  IP Camera Channels 32 IP Channels  Resolution Support 12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIF  Compression H.265, H.264, MJPEG	Material	SGCC	
Operating System Microsoft Windows 10 IoT Enterprise  Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage)  Software Video Management Solution - SATATYA SAMAS  VIDEO  IP Camera Channels 32 IP Channels  Resolution Support 12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIF  Compression H.265, H.264, MJPEG	Net Weight	13.9 kg (without HDD)	
Event Database Microsoft SQL Server Express Edition (upto 10 GB of Storage)  Software Video Management Solution - SATATYA SAMAS  VIDEO  IP Camera Channels 32 IP Channels  Resolution Support 12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIF  Compression H.265, H.264, MJPEG	SOFTWARE		
Software Video Management Solution - SATATYA SAMAS  VIDEO  IP Camera Channels 32 IP Channels  Resolution Support 12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIF  Compression H.265, H.264, MJPEG	Operating System	Microsoft Windows 10 IoT Enterprise	
VIDEO  IP Camera Channels  Resolution Support  12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIF  Compression  H.265, H.264, MJPEG	Event Database	Microsoft SQL Server Express Edition (upto 10 GB of Storage)	
IP Camera Channels32 IP ChannelsResolution Support12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIFCompressionH.265, H.264, MJPEG	Software	Video Management Solution - SATATYA SAMAS	
Resolution Support 12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIF Compression H.265, H.264, MJPEG	VIDEO		
Compression H.265, H.264, MJPEG	IP Camera Channels	32 IP Channels	
·	Resolution Support	12MP, 8MP, 5MP, 3MP, 2MP, 720P, D1, 2CIF,CIF, QCIF	
ONVIF Profile Support ONVIF Profile S & G	Compression	H.265, H.264, MJPEG	
··	ONVIF Profile Support	ONVIF Profile S & G	

# 32 Channel Enterprise NVR with 8 SATA Port



IP Camera Supports	Matrix IP Camera, Third Party – ONVIF Profile S Supported (V2.2 and above)	
Active Directory Support	Yes	
User Roles and Rights	Yes	
DISPLAY		
Smart Client Layout	1x1, 2x2, 3x3, 4x4, 5x5, 6x6, 8x8, 1+3, 1+5, 1+7 and Sequential Views and Windows Sequence	
Local Decoding	1x 4K/ 4x 1080P/ 16 x D1 @H.264	
Digital Zoom on Live	Yes	
Snapshot	Yes	
OSD	Channel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)	
	RECORDING AND STREAMING	
Simultaneous Login	Default: 5 Max: 99+1 (Admin), users can be added with additional license	
Pre-Record	Up to 30 Sec	
Post-Record	1 Day	
Snapshot Format	JPEG	
Recording Format	Native	
Recording Types	Continuous, Manual, Motion, Schedule, Adaptive, Event Activated Recording	
Special Recording	Time Lapse Recording and Day-Highlights	
Adaptive Recording	Automatically Reduces the Number of Frames Captured Per Second Where There is No Motion, Thereby Saving Storage Space	
Stream Configuration	Stream Parameters, CODEC, Resolution, FPS and GOP	
Stream Usages	Recording, Viewing, Analytics	
FPS	1-60fps	
GOP	1-120 GOP	
	INTEGRATED PLATFORMS (Ethernet/Network)	
Redundant Service	Yes Storage & Recording Services (N+1)	
Failover Service	Yes Storage & Recording Services (N+1) & Network ISP Service (1+1)	
Matrix IVA Service	Yes (Basic & Advance IVAs, ANPR, Parking Management & More)	
Business Application	SAP, ERP and POS	
Access Control System	Yes Matrix COSEC Server and COSEC PANEL LITE for Aux I/O Integrations	
Streaming Services	Yes For Integrations with Third Party IVA and Investigation Agency	
E-NVR Clients	Desktop Client: SATATYA Smart Client, Video Wall Client Mobile Clients for Android and iOS Devices	
PLAYBACK AND BACKUP		
Synchronous Playback	16 channels @ 1080P (via Ethernet), 4 Channels @1080P (Local Display)	
Search Mode	Date and Time, Camera, Recording Type	
Playback Modes	Fast Forward (upto 16x), Fast Reverse (upto -16x), Next Frame, Previous Frame	
Backup and Archive	3 Levels, Video Grooming Technology	

## 32 Channel Enterprise NVR with 8 SATA Port




Backup Location	Local Removal Drive, NAS, FTP	
Maximum User	Default: 10 Max: 999, users can be added with additional license	
Remote Operation	Monitor, PTZ Control, Playback, System Setting, File Download, Log Information	
PERCEPTIVE MONITORING		
Hierarchical E-map	Yes	
Alarm Management	Yes (Report, Acknowledge, Close & Alarm Logs)	
System Health Dashboard	Yes	
Investigator	Video Content Analysis on Recorded Video (Over Network Client)	
One Click Control	IPC view, Recording Status, Health, Snapshot, Manual Recording, Digital Zoom In and Out, Change Stream, Share Live View	
On Screen PTZ Control	Yes, using Virtual PTZ Joystick	
SURVEILLANCE LOGS		
Logs	Event Logs, Audit Trails, Alarm Logs and Online User information	
Reports	Summary Report, Downtime Analysis Report, Evidence Reports, System Health Reports	
Report Scheduler	Yes (Daily, Weekly, Monthly)	
EVENTS AND ACTION		
Events	Video Surveillance Events, System Events, User Events, Audit Trails Events	
Action	Recording on Selected Channel, Upload Images on FTP/Email server, Email Notification with Snapshot, Trigger IVA, Recall PTZ Preset Position, Turn On/Off Alarm Outputs, Buzzer Notification, SMS Notification, Calling from Mobile App, Share files data, Trigger Aux Output	

NOTE 1: Installing the product you also adhere to Microsoft's Software License terms for Microsoft Windows IoT product usage terms as well as Microsoft and Matrix's CLA Terms, as the product includes an embedded Microsoft Windows Operating System. For more details, please refer to Matrix's <u>EULA</u> respecting the said product/solution.

NOTE 2: Technical Specifications are subject to change without prior notice.

\*The storage capacity of E-NVR depends on the number of hard drives installed in the device.\*

### **DIMENSIONS** (in mm)

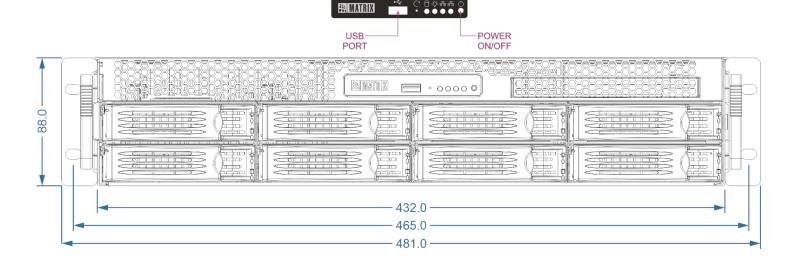

### 32 Channel Enterprise NVR with 8 SATA Port



#### **ABOUT MATRIX**

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa, and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.



#### **MATRIX COMSEC**

Head Office 394-GIDC, Makarpura, Vadodara-390010, India.

Ph: +91 265-613-7222

E-mail: Inquiry@MatrixComSec.com

### **Factory**

19-GIDC, Waghodia, Dist. Vadodara-391760, India.

Ph: +91 265-613-7222

#### **MATRIX COMSEC - North America**

2 Wickstead Crt, Brampton, Ontario, L6R 1N8. +1 408-643-0581 (USA) +1 437-266-1005 (Canada)

www.MatrixComSec.com