64 Channel NVR with 8 SATAPort







Compression: H.265

Decoding: 4K

Channel: 64Channels

Storage: 8 SATA Port (10TB each)

Throughput: 512Mbps

Matrix NVRs are packed with high end processors to deliver all the functionalities like high resolution recording, playback, simultaneous local and remote monitoring along with storing for higher number of days. Furthermore, these latest NVRs are also backed with an intelligent software to detect threats and send instant notifications for real-time security.

All in all, these comprehensive, flexible, reliable, integrated NVRs provide a proficient, persistent and a preventive security solution suitable for enterprises and multi-location offices.

KEY FEATURES



H.265 Compression



4K Decoding



12MP Recording



Cascading



Adaptive Recording



Camera-wise Recording Retension

CERTIFICATION











64 Channel NVR with 8 SATAPort



TECHNICAL SPECIFICATIONS		
VIDEO		
Input	64 IP Channels	
Output	HDMI (2.0) – 1 Port (Main)	
Compression	H.265/H.264/ Motion JPEG	
Compression	AUDIO	
Input	1 Channel, RCA Port(2.0Vp-p), Range (-2dBu to 22dBu)	
Output	1 Channel, RCA Port Mono, Unbalanced output, (2.0Vp-p),	
Output	Range (-2dBu to 22dBu)	
Compression	G.711µ	
Two-Way Audio	Yes	
THROUGHPUT		
Downlink Throughput	256Mbps	
	Following Scenarios are Considered:	
	Cameras Streaming to Device	
	Cameras of Cascaded Devices are Being Viewed on Local	
	3. Streaming from NAS for Local/Web Client	
Uplink Throughput	256Mbps	
Opinik Till Odgripat	·	
	Following Scenarios are Considered: 1. Cameras Streaming to Web Client	
	2. Storage or Backup to NAS	
Simultaneous Log-in	9+1(Admin)	
Silituitaneous Log-iii	DISPLAY	
Split (Through	1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8	
LAN/HDMI)	and Sequential	
Local Decoding	4x 4K/ 10x 3MP/ 16x 1080P/ 64 x D1	
Snapshot	Yes	
Multiple Camera Viewing		
OSD	Channel Number and Name, Status, Video Loss, Recording and Disabled Channel	
030	(As per camera support)	
	RECORDING	
Image Resolution	12MP, 8MP, 5MP,3MP, 2MP, 720P, D1, CIF	
Pre-Record	Up to 30 Sec	
Post-Record	10-300 Sec	
Snapshot Format	JPEG	
Recording Format	Native	
Recording Types	Scheduled, Manual, Alarm and COSEC	
STORAGE AND BANDWIDTH OPTIMIZATION		
Adaptive Recording	Automatically Reduces the Number of Frames Captured Per Second Where	
	There is No Motion, Thereby Saving Storage Space.	
Bandwidth	Automatically Adapts Optimized Resolution on Local Display Through HDMI	
PLAYBACK AND BACKUP		
Synchronous Playback	16 Channels @ 1080P (via. HDMI)	
Search Mode	Date and Time, Camera, Recording Type, Recording Drive	

64 Channel NVR with 8 SATAPort




Playback Modes	Fast Forward, Slow Forward, Slow Reverse, Fast Reverse at Different Speed Control, Next-Previous Frame		
Backup	Manual Backup over USB and NAS,		
	Scheduled Backup over USB, NAS and FTP		
	Scheduled Backup over USB through USB2.0 Interface		
Configuration Backup	Manual Backup over USB through USB3.0 Interface Yes		
Network Functions	TCP/IP, DHCP, PPPOE, DDNS, Free Matrix DNS, FTP, SMTP, NTP, RTP/RTSP,		
Network i diletions	CIFS/NFS, Network Acceleration, UDP		
Maximum User	120		
Remote Operation	Monitor, PTZ Control, Playback, System Setting, File Download, Log Information, Upgrade		
	EVENTS AND ACTIONS		
Trigger Events	Motion Detection, View Tampering, Trip wire, Object Intrusion, Audio Exception, Missing Object, Suspicious Object, Loitering, Object Counting, Recording Start, Recording Fail, Camera Offline, Camera Online		
System Events	Manual Trigger, On Boot Alarm, Storage Alert, Disk Volume Full, Disk Fault, Scheduled Backup Fail		
Actions	Recording on Selected Channel, Upload Images on FTP/Email Server, Email Notification with Snapshot, TCP Notification, Recall PTZ Preset Position, Turn On/Off Alarm Outputs, Buzzer Notification, SMS Notification, Calling from Mobile App		
	STORAGE		
SATA Interface	8 SATA III (10TB per port)		
NAS	2 NAS (CIFS/ NFS)		
USB	1 TB USB Drive		
RAID	RAID-0, RAID-1, RAID-5, RAID-10		
Retention	Camera wise, HDD usage % wise, Day wise		
	INTERFACES		
Network Interface	2 Ports x Ethernet (RJ-45) 10/100/1000Mbps		
USB	3 Ports (1x USB 3.0, 2x USB2.0)		
LED	System Status LED, Power LED		
Alarm Input	2		
Alarm Output	1		
Reset switch and Buzzer	Yes		
	SYSTEM INTERFACE		
Processor	ARM Cortex A17 Quad-Core		
RAM	4GB		
Flash	2GB		
Operating System	Embedded Linux		
Control Mode	Mouse, Web Client and Mobile Client		
	CAMERA SUPPORT		

64 Channel NVR with 8 SATAPort



Third Party Camera Support	Cameras with ONVIF 2.0 and above	
ENVIRONMENT CONDITIONS		
Operating Temperature	0°C to +50°C (32°F to 122°F)	
Humidity Range	5% to 95% RH Non-Condensing	
ELECTRICAL AND MECHANICAL		
Power Input	SMPS (100-240-volt AC)	
Dimension(W×H×D)	442 (without clamp) × 105.75 × 355.45	
Weight	5.68kg	

DIMENSIONS

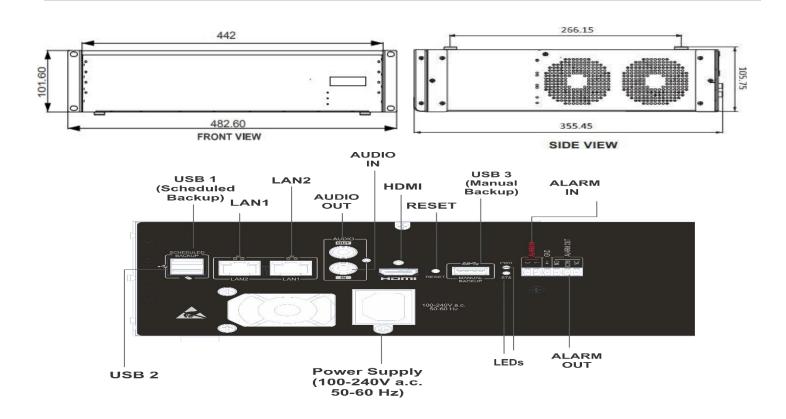

64 Channel NVR with 8 SATAPort



ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.



MATRIX COMSEC

Head Office 394-GIDC, Makarpura, Vadodara-390 010, India. Ph: +91 265-613-7222

E-mail: lnquiry@MatrixComSec.com

Factory

19-GIDC, Waghodia, Dist. Vadodara-391 760, India.

Ph: +91 265-613-7222

MATRIX COMSEC - North America

2 Wickstead Crt, Brampton, Ontario, L6R 1N8. +1 408-643-0581 (USA) +1 437-266-1005 (Canada)

www.MatrixComSec.com