5MP IR Bullet Camera with 6mm Lens with Audio







SATATYA MIBR50FL60CWP

5MP IR Bullet Camera with 6mm Lens with Audio

Matrix Professional Series IP Cameras are built using superior components such as Sony STARVIS sensor and higher MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying lighting conditions. Built in intelligent analytics including Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.

USP



SONY STARVIS SENSOR



H.265 COMPRESSION



IVA



HIGHER FIELD OF VIEW



SMART STREAMING



ADAPTIVE STREAMING



TRUE WDR



NAS

CERTIFICATION













Customer Care: (+91) 265 613 7222

E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com

5MP IR Bullet Camera with 6mm Lens with Audio



TECHNICAL SPECIFICATIONS IMAGE SENSOR		
	1/2.8" SONY - CMOS 5MP Active Pixel	
Sensor Type and Size	Progressive Scan, Back Illuminated Image sensor (STARVIS Series)	
	LENS	
	Color - 0.01 Lux @F1.2 (AGC ON)	
Minimum Illumination	Monochrome - 0 Lux	
Focal Length	6mm	
Focus Range	0.3m to infinity	
	HFOV – 54.3°	
	VFOV – 29.2°	
Field of View (FOV)	DFOV – 63°	
Lens Mount	M12	
Focus	Fixed focus	
Aperture (F#)	F 1.6 / F 2.0	
Iris Type	Fixed	
IR Range	Up to 30m	
IR Led Wavelength	850nm	
IR Switching	Auto/ Manual	
	AUDIO INTERFACE	
Audio IN	1	
Audio OUT	1	
Two-way Audio	Supported	
Audio Compression	G.726 and G.711µ	
	HARDWARE SPECIFICATIONS	
SD Card	Up to 512GB	
Camera Adjustment Angle	Pan: 0° to 360°	
	Tilt: 0° to 90°	
	Rotate: 0° to 360°	
	IMAGE AND VIDEO	
No of Stream Profiles	4	
	Profile 1: 2592x1944p @30fps (H.265/ H.264)	
	Profile 2: D1 @30fps (H.265/H.264)	
Stroam Drofiles	Profile 3: 2048x1536p @8fps (MJPEG)	
Stream Profiles Available Resolutions	Profile 4: 1920x1080p @30fps (H.265/H.264/MJPEG) 2592 x 1944, 2592 x 1520, 2048 x 1536, 1920 x 1080, 720p, D1, VGA,	
Available nesolutions	2592 x 1944, 2592 x 1520, 2048 x 1536, 1920 x 1080, 720p, D1, VGA, 2CIF, CIF	

5MP IR Bullet Camera with 6mm Lens with Audio



Max Resolution	2592 x 1944
Bitrate	128 kbps-16Mbps
Bitrate Type	CBR, VBR
Video Compression	H.265, H.264, MJPEG
Frame Rate	1-30fps
Shutter Speed	1/15s - 1/100000s
Adaptive Streaming	Yes
ONVIF Profiles	Both S and G
Edge Recording	Yes
Alarm Recording	Pre and Post
Motion Recording	Yes
Time Triggered	Yes
Video Parameters	Snapshot, Region of Interest (ROI), BLC, Day/Night Settings
Privacy Masks	8
WDR	True WDR (120dB)
SNR	73dB
Image Enhancement	Saturation/ Contrast/ Sharpness/Brightness/Auto Exposure/HVS-Forensics/ Smart IR
DNR	2D &3D
Video Analytics	Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection, Object Intrusion/Zone Intrusion, Audio Exception
	ALERTS
IP Conflict	Yes
Network Disconnect	Yes
Storage Full	Yes
EVENTS AND ACTIONS	
Upload Image	SD, NAS, FTP
Upload Clip	SD, NAS, FTP
Notifications	E-mail, SMS, TCP
	PROTOCOLS SUPPORTED
Supported protocols	TCP/IP, HTTP, ARP, DSCP, QoS, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP, NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP, 802.1x, SNMP, UPnP, Bonjour, UDP
Web Viewer	Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0
Browser	IE, Chrome, Mozilla


5MP IR Bullet Camera with 6mm Lens with Audio




OPERATING PARAMETERS		
Power Supply	12V (DC); 802.3af (PoE)	
Power Consumption	Approximately 5.5W	
Operating Humidity	Less than 95% RH (non-condensing)	
Operating Temperature	-30°C to 60°C	
Storage Temperature	-30°C to 60°C	
PHYSICAL PARAMETERS		
Communication interface	10Base-T/100BaseTX Ethernet (RJ-45)	
Weight	500gms	
Color	Infinity White	
Dimensions	155 x 75 (Length x Width)	
Storage	NAS, SD Card	
Certifications	BIS, CE, IP67, FCC Part-15 Subpart – B, ONVIF S & G	

^{*}Specifications are subject to change without prior notice

DIMENSIONS (in mm)



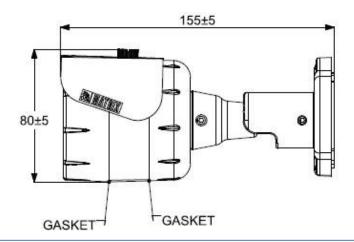



5MP IR Bullet Camera with 6mm Lens with Audio



ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.



MATRIX COMSEC

Head Office 394-GIDC, Makarpura, Vadodara – 390 010, India.

Ph: +91 265 613 7222

E-mail: Inquiry@MatrixComSec.com

Factory

19 – GIDC, Waghodia, Dist. Vadodara – 391 760, India.

Ph: +91 265 613 7222

MATRIX COMSEC - North America

2 Wickstead Crt, Brampton, Ontario, L6R 1N8.

Ph: (+1) 408-643-0581 (USA) Ph: (+1) 437-266-1005 (Canada)

www.MatrixVideoSurveillance.com